



OWNER'S / OPERATOR'S MANUAL



READ THIS MANUAL CAREFULLY!
It contains important safety information.

YTF2 SVB ADVENTURER TWO FAIRWAY LOUNGE EFI VEHICLE

 WARNING

The engine exhaust from this product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.

YAMAHA

LIT-CALIF-65-01

INTRODUCTION

Congratulations on your purchase of a Yamaha fairway lounge vehicle. This manual contains information you will need for proper operation, maintenance, and care of your fairway lounge vehicle. A thorough understanding of these simple instructions will help you to obtain maximum enjoyment from your new Yamaha.

If you have any questions about the operation or maintenance of your fairway lounge vehicle, please consult a Yamaha dealer.

Yamaha Motor Corporation USA

**FAIRWAY LOUNGE
OWNER'S/OPERATOR'S MANUAL
© 2017 by Yamaha Motor Corporation
USA
1st Edition
All rights reserved. Any reprinting
or unauthorized use without the
written permission of
Yamaha Motor Corporation USA
is expressly prohibited.
Printed in U.S.A.
LIT-19626-69-17**



JD6-F8199-31

IMPORTANT MANUAL INFORMATION

Particularly important information is distinguished in this manual by the following notations:



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.

WARNING

A **WARNING** indicates a hazardous situation which, if not avoided, could result in death or serious injury.

NOTICE

A **NOTICE** indicates special precautions that must be taken to avoid damage to the vehicle or other property.

TIP

A **TIP** provides key information to make procedures easier or clearer.

TIP

Yamaha continually seeks advancements in product design and quality; therefore, while this manual contains the most current product information available at the time of printing, there may be minor discrepancies between your vehicle and this manual. If you have any questions concerning this manual, please consult your Yamaha dealer.

WARNING

Read and understand this manual completely before operating your vehicle. This manual should be considered a permanent part of your vehicle and should remain with the vehicle when resold.

CONTENTS

WARRANTY

1

IMPORTANT LABELS

2

OPERATOR SAFETY

3

SAFETY CONSIDERATIONS

4

CONTROLS

5

PRE-OPERATION CHECKS

6

OPERATION

7

MAINTENANCE

8

STORAGE

9

SPECIFICATIONS

10

WIRING

11

WARRANTY

LIMITED 2-YEAR WARRANTY FOR TRANSPORTATION AND UTILITY VEHICLES

Yamaha Golf-Car Company hereby warrants that any new Yamaha utility vehicle or any multi passenger cars or specialty vehicles purchased from Yamaha, or an Authorized Dealer or Distributor in the United States will be free from defects in material and workmanship for TWO years from date of purchase, subject to the stated limitations. DURING THE PERIOD OF WARRANTY, any authorized Yamaha golf car service technician, dealer, or distributor will, free of charge, repair or replace, at Yamaha's option, any part adjudged defective by Yamaha due to faulty workmanship or material from the factory. Parts used in warranty repairs will be warranted for the balance of the vehicle's warranty period. All parts replaced under warranty become property of Yamaha Golf-Car Company.

Common Parts		Electric Car Specific	
Frame	2 Years	Battery - Trojan ' T875 ' without HydroLink Watering System	4 Years or 23,500 amp-hours whichever comes first *Detailed condition on the next page
Transaxle	2 Years	Electric Motor	2 Years
Pedals	2 Years	Motor Controller / Charger	2 Years
Brakes (excluding shoes / pads)	2 Years	Charger Cord	2 Years
Electrical wires, switches, and relays	2 Years	Charger Receptacle	2 Years
Suspension / Steering components	2 Years	Throttle Position Sensor	2 Years
Seats	2 Years	GAS Car specific	
Sun Top	2 Years	Exhaust / Intake / Generator	2 Years
Bumpers / Body Parts	2 Years	Gas Engine	2 Years
Floor Mats	2 Years	Throttle Cables / Controls	2 Years
Scorecard Holders	2 Years	Battery	1 Years
Bag Carrier	2 Years	Clutch (excluding drive belt)	2 Years
Common Accessories			
Windshield	3 Years	All Remaining Parts	1 years
Head Light	2 Years		
Tail Light	2 Years		

EXCLUSIONS from this Warranty shall include any failures caused by:

- Abnormal strain, neglect, or abuse, including lack of proper maintenance, and use contrary to the Owner's/Operator's Manual instructions.
- Accident or collision damage.
- Installation of parts or accessories that are not original equipment.
- Fading, rust, or deterioration due to exposure or ordinary wear and tear.
- Modifications or alterations that affect the car's condition, operation, performance, or durability, or which makes the car serve a purpose other than use as a two-person, golf course vehicle.
- Damage due to improper transportation.
- Acts of God, i.e. lightning, hail damage, flooding, fire, etc.

This Limited Warranty does not cover any parts replaced due to normal wear or routine maintenance, including oil and air filter elements, brake shoes, tire wear, spark plugs, starter and clutch drive belts. Any charges incurred in transporting a golf car or charger to and from an authorized Yamaha golf car dealer for service or in performing field service are also excluded from this warranty. Gasoline powered golf car starting batteries on vehicles equipped with a golf course GPS device, or any other device with a parasitic current draw, unless the vehicle is equipped from the factory with an optional deep cycle starting battery, are also excluded from this warranty.

THE CUSTOMER'S RESPONSIBILITY under this warranty shall be to operate and maintain the golf car and charger as specified in the appropriate Owner's/Operator's Manual, and give notice to an authorized Yamaha golf car dealer of any and all apparent defects within ten (10) days after discovery, and make the vehicle or charger available at that time for inspection and repairs by the dealer's authorized representative.

WARRANTY TRANSFER: This warranty is to the original owner only and is not transferable.

Yamaha Golf-Car Company makes no other warranty of any kind, expressed or implied. All implied warranties of merchantability and fitness of merchantability and fitness for a particular purpose which exceed the obligations and time limits stated in this warranty are hereby disclaimed by Yamaha Golf-Car Company and excluded from this Warranty. Some states do not allow limitations on how long implied warranty lasts, so the above limitation may not only apply to you. Also excluded from this Warranty is any incidental or consequential damages including loss of use. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion may not apply to you. This Warranty give you specific legal rights, and you may also have other rights, which vary, from state to state.

Yamaha Motor Corporation, USA, KENNESAW, GEORGIA 30144

EFFECTIVE DATE: 7/1/16

WARRANTY

CALIFORNIA EMISSION CONTROL WARRANTY STATEMENT YOUR WARRANTY RIGHTS AND OBLIGATIONS

1

The California Air Resources Board and Yamaha Golf-Car Company are pleased to explain the emissions control system warranty on your 2010 and later small off-road engine (SORE) vehicle. In California, new SORE vehicles must be designed, built and equipped to meet the State's stringent anti-smog standards. Yamaha Golf-Car Company must warrant the EECS on your SORE vehicle for the period of time listed below provided there has been no abuse, neglect or improper maintenance of your SORE vehicle.

Your EECS may include parts such as the carburetor, fuel-injection system, the ignition system, catalytic converter, fuel tanks, fuel lines, fuel caps, valves, canisters, filters, vapor hoses, clamps, connectors, and other associated emission-related components.

Where a warrantable condition exists, Yamaha Golf-Car Company will repair your SORE vehicle at no cost to you including diagnosis, parts and labor.

MANUFACTURER'S WARRANTY COVERAGE:

This emissions control system is warranted for two years. If any emission-related part on your equipment is defective, the part will be repaired or replaced by Yamaha Golf-Car Company.

OWNER'S WARRANTY RESPONSIBILITIES:

As the SORE vehicle owner, you are responsible for performance of the required maintenance listed in your owner's manual. Yamaha Golf-Car Company recommends that you retain all receipts covering maintenance on your SORE vehicle, but Yamaha Golf-Car Company cannot deny warranty solely for the lack of receipts.

As the SORE vehicle owner, you should however be aware that Yamaha Golf-Car Company may deny you warranty coverage if your SORE vehicle or a part has failed due to abuse, neglect, or improper maintenance or unapproved modifications.

You are responsible for presenting your SORE vehicle to Yamaha Golf-Car Company's distribution center or service center as soon as the problem exists. The warranty repairs should be completed in a reasonable amount of time, not to exceed 30 days. If you have a question regarding your warranty coverage, you should contact Yamaha Customer Relations at 800-962-7926.

GENERAL EMISSIONS WARRANTY COVERAGE:

Yamaha Golf-Car Company warrants to the ultimate purchaser and each subsequent purchaser that the SORE vehicle is:

Designed, built and equipped so as to conform with all applicable regulations; and

Free from defects in materials and workmanship that cause the failure of a warranted part to be identical in all material respects to that part as described in Yamaha Golf-Car Company's application for certification.

The warranty period begins on the date the SORE vehicle is delivered to an ultimate purchaser or first placed into service. The warranty period is two years.

Subject to certain conditions and exclusions as stated below, the warranty on emission-related parts is as follows:

1. Any warranted part that is not scheduled for replacement as required maintenance in the written instructions supplied, is warranted for the warranty period stated above. If the part fails during the period of warranty coverage, the part will be repaired or replaced by Yamaha Golf-Car Company according to subsection (4) below. Any such part repaired or replaced under warranty will be warranted for the remainder of the period.
2. Any warranted part that is scheduled only for regular inspection in the written instructions supplied is warranted for the warranty period stated above. Any such part repaired or replaced under warranty will be warranted for the remaining warranty period.
3. Any warranted part that is scheduled for replacement as required maintenance in the written instructions supplied is warranted for the period of time before the first scheduled replacement date for that part. If the part fails before the first scheduled replacement, the part will be repaired or replaced by Yamaha Golf-Car Company according to subsection (4) below. Any such part repaired or replaced under warranty will be warranted for the remainder of the period prior to the first scheduled replacement point for the part.
4. Repair or replacement of any warranted part under the warranty provisions herein must be performed at a warranty station at no charge to the owner.
5. Notwithstanding the provisions herein, warranty services or repairs will be provided at all of our distribution centers that are franchised to service the subject engines or equipment.
6. The SORE vehicle owner will not be charged for diagnostic labor that is directly associated with diagnosis of a defective, emission-related warranted part, provided that such diagnostic work is performed at a warranty station.
7. Yamaha Golf-Car Company is liable for damages to other engine or equipment components proximately caused by a failure under warranty of any warranted part.

WARRANTY

1

8. Throughout the SORE vehicle warranty period stated above, Yamaha Golf-Car Company will maintain a supply of warranted parts sufficient to meet the expected demand for such parts.
9. Any replacement part may be used in the performance of any warranty maintenance or repairs and must be provided without charge to the owner. Such use will not reduce the warranty obligations of Yamaha Golf-Car Company.
10. Add-on or modified parts that are not exempted by the Air Resources Board may not be used. The use of any non-exempted add-on or modified parts by the ultimate purchaser will be grounds for disallowing a warranty claims. Yamaha Golf-Car Company will not be liable to warrant failures of warranted parts caused by the use of a non-exempted add-on or modified part.

WARRANTED PARTS:

The repair or replacement of any warranted part otherwise eligible for warranty coverage may be excluded from such warranty coverage if Yamaha Golf-Car Company demonstrates that the SORE vehicle has been abused, neglected, or improperly maintained, and that such abuse, neglect, or improper maintenance was the direct cause of the need for repair or replacement of the part. That notwithstanding, any adjustment of a component that has a factory installed, and properly operating, adjustment limiting device is still eligible for warranty coverage. The following emission warranty parts are covered:

1. Fuel Tank
2. Fuel Cap
3. Fuel Line
4. Fuel Line Fittings
5. Clamps
6. Control Valves
7. Control Solenoids
8. Electronic Controls
9. Control Cables
10. Control Linkages
11. Vapor Hoses
12. Carbon Canister
13. Canister Mounting Brackets


IMPORTANT LABELS

! SAFETY AND INSTRUCTION LABELS


! WARNING

Read the following labels carefully before operating your vehicle, and promptly replace any labels which become damaged or removed. Death or serious personal injury can result from failing to read and comply with the safety instruction labels.

2

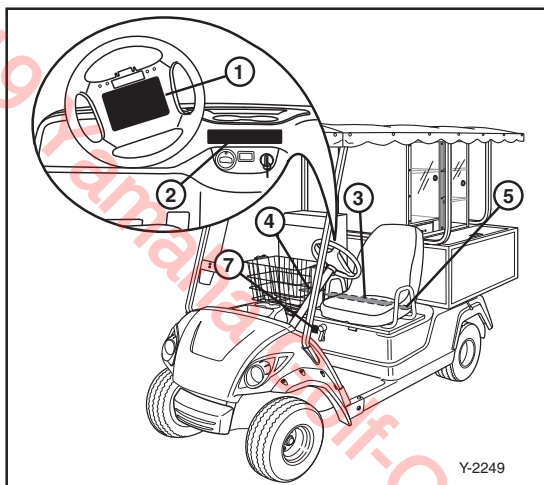

Y-2249

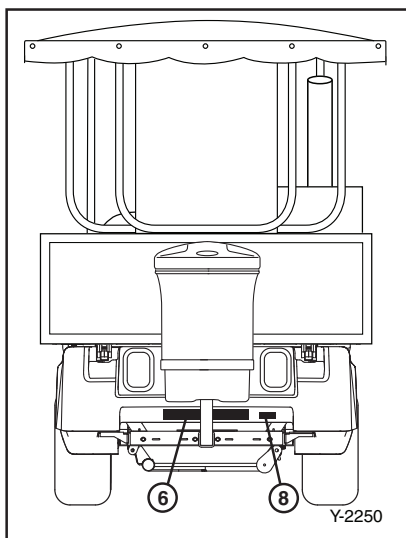

Y-2250

①

! WARNING

To reduce the risk of accidents and injury or DEATH:

- Never travel at speeds too fast for the terrain, visibility conditions, or your experience.
- Drive with extra caution in congested areas, when operating in reverse, and when driving on wet, rough, or loose surfaces.

OPERATING INSTRUCTIONS

- Read the warning label on the beverage holder panel before operating.
- Be sure occupants are seated.
- Select "FORWARD" OR "REVERSE" then turn main switch to "ON".
- Press the accelerator pedal to start moving. The motor will start and the parking brake will release automatically.
- To stop, release the accelerator pedal and press the brake pedal. Press the parking brake until it locks, and turn the main switch to "OFF" before leaving the vehicle.
- Come to a complete stop before reversing direction.
- Read the Owner's/Operator's Manual for more information.



ATTENTION

- This vehicle was not manufactured for use on public streets and does not comply with federal motor vehicle safety standards applicable to passenger cars.

YAMAHA

JWB-K7763-00

IMPORTANT LABELS

②

⚠ WARNING	
To reduce the risk of accidents and injury or DEATH: - Vehicle capacity: 1 operator and 1 passenger. - Remain seated and hold on while in motion. - Keep entire body inside vehicle. - Passenger and cargo can affect vehicle handling. - Drive slowly in turns.	Drive straight up and down hills-driving across the side of hill increases the risk of overturn. - Vehicle rated capacity (driver, passenger, cargo, trailer, and load) 1300 lb (590 kg) on level surface. - This vehicle is recommended only for operators 16 or older with a valid motor vehicle license. - Adults must supervise use by minors. Check state laws for minimum age requirements. - Locate and read Owner's Manual. Follow all instructions and warnings.
YAMAHA	  JW7-K7768-30

③

⚠ WARNING		⚠ AVERTISSEMENT	
 GASOLINE IS HIGHLY FLAMMABLE AND EXPLOSIVE. A fire or explosion could cause SEVERE INJURY or DEATH. - Keep heat, sparks, and open flame away from fuel tank and fuel lines. - Do not add fuel while engine is running. - Do not modify fuel system. - Services should be performed by dealer or qualified personnel. YAMAHA	OPERATION AT HIGHER SPEEDS COULD CAUSE LOSS OF CONTROL THAT COULD RESULT IN SEVERE INJURY OR DEATH. Do not tamper with governor to increase speed.	L'ESSENCE EST HAUTEMENT INFLAMMABLE ET EXPLOSIVE. Un incendie ou une explosion peut provoquer de GRAVES BLESSURES ou la MORT. - Éloigner toute source de chaleur, d'étincelles et de flammes nues du réservoir et des conduites de carburant. - Ne pas ajouter de carburant pendant que le moteur tourne. - Ne pas modifier le circuit d'alimentation. - Les révisions doivent être effectuées par le concessionnaire ou par du personnel qualifié.	L'UTILISATION À DES VITESSES SUPÉRIEURES PEUT ENTRAINER UNE PÉRIE DE CONTRÔLE QUI PEUT PROVOQUER DE GRAVES BLESSURES OU LA MORT. Ne pas alléger le régulateur pour augmenter la vitesse.
 N432		 JW1-K6207-01	

Y-1669a

IMPORTANT LABELS

④

This spark ignition system meets all requirements of the Canadian Interference Causing Equipment Regulations.


Ce système d'allumage par étincelle de véhicule respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.

YAMAHA

JN6-H2377-00

Y-1606

⑦

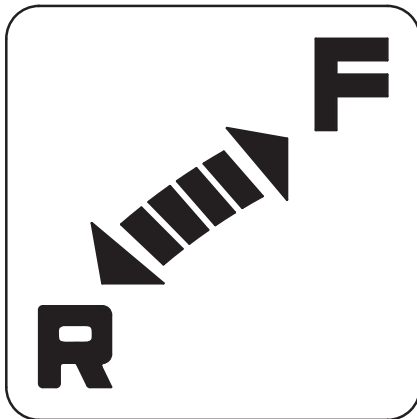

Y-1610b

2

⑤

EMISSION CONTROL INFORMATION YAMAHA MOTOR CO., LTD.

THIS EQUIPMENT CONFORMS TO 2013 CALIFORNIA EVAP/EXH EMISSION REGULATIONS AND MEETS U.S. EPA EVAP STANDARDS FOR SMALL OFF-ROAD ENGINES. THIS ENGINE CONFORMS TO PHASE 3 U.S. EPA REGULATIONS FOR SMALL OFF-ROAD ENGINES.



EF-DYMXS.3572EG

DOM: JANUARY 2013

THIS ENGINE IS CERTIFIED TO OPERATE ON UNLEADED GASOLINE

DISPLACEMENT: 357 cc.

EMISSION CONTROL SYSTEM: TBI

EVAPORATIVE CODE CARB: CCYMX33A

EVAPORATIVE CODE EPA: DYMXPNHEQ33A

MAINTENANCE SPECIFICATIONS


IGNITION TIMING: 27 BTDC

NO OTHER ADJUSTMENTS NEEDED

ENGINE OIL: SAE 10W-30

SPARK PLUG GAP: .028-.031

The air index of this engine is 3



Note: The lower the Air Index, the less Pollution

This engine is certified to be emissions compliant for the following use:

☐ Moderate (125 hours) ☐ Intermediate (250 hours) ☒ Extended (1000 hours)

Check owner's manual for further details.

JC0-F179T-01

⑧



Y-1673a

IMPORTANT LABELS

2

⑥

WARNING

Improperly loading a trailer or pulling an object can affect handling, stability, and risk of overturn or other accidents.

- Vehicle rated capacity: 1300 lb (590 kg) maximum including weight of operator, passenger, accessories, cargo, and (if applicable) trailer tongue weight. G.V.W. = 2105 lb (955 kg)
- Secure load to prevent it from shifting.
- Never load more than 150 lb (68 kg) tongue weight on the towing bracket.
- Do not tow more than 1000 lb (454 kg) rolling weight (trailer plus cargo).
- Read Owner's/Operator's Manual before loading, towing, or pulling objects.


YAMAHA

JW7-F1696-30

IMPORTANT LABELS

2

A

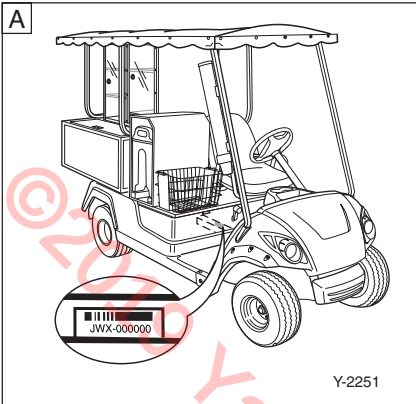


FAIRWAY LOUNGE VEHICLE SERIAL NUMBER

The vehicle serial number (A) is identified in the location shown.

TIP

The first three digits of the serial number are for model identification; the remaining digits are the unit production number. Keep a record of these numbers for reference when ordering parts from a Yamaha dealer.


B

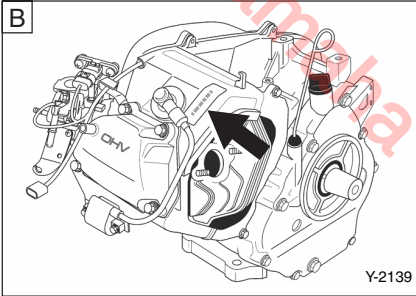

The engine serial number (B) is affixed in the location shown.

Engine Information

C

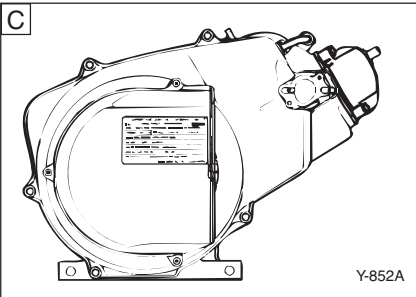

IMPORTANT ENGINE INFORMATION				YAMAHA	
ENGINE FAMILY : *****					
REFER TO OWNER'S MANUAL FOR MAINTENANCE SPECIFICATIONS AND ADJUSTMENTS.					
DISPLACEMENT:	*** cm ³	VALVE LASH(mm)	IN: **_.**	EX: **_.**	
IGNITION TIMING & FUEL MIXTURE		NO OTHER ADJUSTMENTS NEEDED.			
IDLE SPEED:	**** rpm	AT NO LOAD			
FUEL: THIS ENGINE IS CERTIFIED TO OPERATE ON UNLEADED GASOLINE.					
ENGINE OIL:	SAE 10W-40	TYPE:	SD		
THIS ENGINE MEETS ***** CALIFORNIA EMISSION REGULATIONS FOR OFF-ROAD ENGINES. THIS ENGINE CONFORMS TO ***** U.S. EPA REGULATIONS FOR SMALL OFF-ROAD ENGINES.					
YAMAHA MOTOR CO., LTD.					

Y-851B




OPERATOR SAFETY

3

Yamaha fairway lounge vehicles are designed to be simple to operate. However, be sure to observe the following to reduce the risk of serious injury or death due to loss of control and other hazards:

BEFORE OPERATING THE FAIRWAY LOUNGE VEHICLE

- Read this Owner's/Operator's manual and all safety and instruction labels on the vehicle before operating.
- Perform the pre-operation checks found in Section 6 of this manual.
- Only authorized people should drive the vehicle, from the driver's side only, and only in designated areas.
- Do not allow more than two occupants per seat. This vehicle is restricted to two occupants.
- Never carry passengers in the display cabinet.
- Do not operate the vehicle while under the influence of alcohol or drugs; their effect on vision and judgment make operating a fairway lounge vehicle dangerous.
- Do not operate the vehicle on public streets, roads or highways unless allowed by law or local regulating authority.

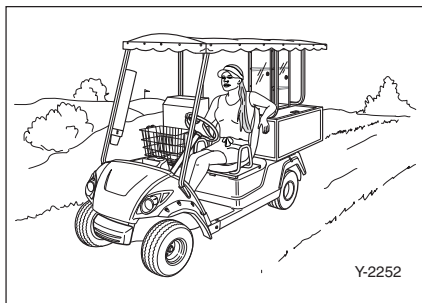



WHILE OPERATING THE VEHICLE

- Keep your entire body inside the vehicle, remain seated and hold on when the vehicle is in motion.
- Do not start the vehicle until all occupants are seated.



OPERATOR SAFETY

3

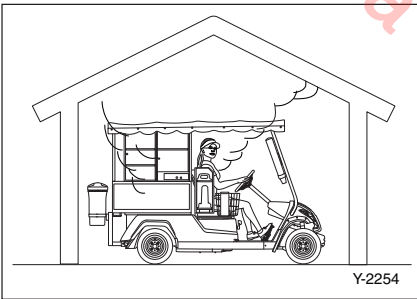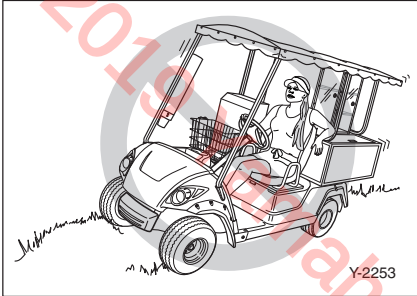

- Keep your hands on the steering wheel and your eyes on the path ahead.
- Use extra care in congested areas or when backing up. Always back up slowly, and watch carefully.
- Avoid starting or stopping abruptly.
- Vary the speed of the vehicle to match the terrain of the course.
- Avoid turning the steering wheel too sharply at higher speeds to avoid tipping or rolling the vehicle.
- Always drive slowly straight up or straight down slopes – never at an angle to avoid tipping or rolling the vehicle.
- Do not brake abruptly when carrying loads in the display cabinet or when towing a trailer.
- Do not run the engine indoors. Exhaust gas is poisonous and could result in carbon monoxide poisoning.
- Do not make any modification or addition which affects capacity or safe operation, or make any changes not in accordance with the owner's/operator's manual.



SAFETY CONSIDERATIONS

Like all machines, fairway lounge vehicles can cause injury if improperly used or maintained. This section contains broad safety practices required for safe operation. Before vehicles are operated, personnel should establish any additional safety practices that may be required for safe operation.

Experience has shown that fairway lounge vehicles are safe when operated in accordance with the safety warnings affixed to every vehicle. This safe operation is enhanced when fairway lounge vehicles are used according to the safety rules and practices established to meet the terrain and conditions of the course they are used on.

The information contained here is intended for authorized personnel responsible for fairway lounge vehicle safety. If you are responsible for the operation and maintenance of this vehicle, we encourage you to implement a safety program.

DRIVER QUALIFICATIONS

Allow only authorized people to operate fairway lounge vehicles. It is recommended that only people who possess a valid motor vehicle driver's license be allowed to operate fairway lounge vehicles.

Place operation and safety instructions recommended by the vehicle manufacturer, along with the safety rules, in a conspicuous place near the vehicle storage area. It is also recommended that the following warning sign be posted in a conspicuous location:

WARNING

Do not operate fairway lounge vehicles when under the influence of alcohol or drugs. Death or serious personal injury can result from failing to comply with this warning instruction.

HAZARD PREVENTION

The following hazards must be made safe:

- **Steep Grades.** Where steep grades exist, restrict vehicles to designated vehicle pathways where possible. In addition, identify steep grades with a suitable warning sign like:

WARNING

Descend steep grades slowly with foot on brake. Death or serious personal injury can result from failing to comply with this warning instruction.

- **Sharp Turns, Blind Corners and Bridge Approaches.** Adhere to all warning signs and take proper precautions to avoid the hazard.
- **Wet Areas.** Wet grass may cause a vehicle to lose traction and may affect stability. Vehicle operators should reduce speed in wet areas or during periods of inclement weather.



SAFETY CONSIDERATIONS

- **Loose Terrain.** Avoid areas of loose terrain that may cause a vehicle to lose traction and affect stability. Take notice of conditions and reduce speed when driving on uneven or loose terrain.
- **Fairway Lounge Vehicle and Pedestrian Interference.** Avoid areas with pedestrian traffic or congested areas whenever possible to prevent accidents. If it is impractical to avoid these areas, always remember that pedestrians have the right of way. When approaching pedestrian or congested areas, always reduce speed, drive slowly, use caution and watch for pedestrians.

ACCESSORIES AND LOADING

Accessories

Accessories can affect the handling and control of your vehicle. Keep the following in mind when considering an accessory or operating a fairway lounge vehicle which has accessories.

- Choose only accessories designed for your vehicle. Your Yamaha dealer has a variety of genuine Yamaha accessories. Other accessories may also be available on the market. However, it is not possible for Yamaha to test all non-Yamaha accessories, nor have any control over the quality or suitability of them. Choose a genuine Yamaha accessory, or one that is equivalent in design and quality.
- Accessories should be rigidly and securely mounted. An accessory which can shift position or come off while you are operating could affect your ability to control the vehicle.
- Do not mount an accessory where it could interfere with your ability to control the vehicle. Examples include (but are not limited to) an object that limits your ability to turn the steering wheel or one that limits your view.
- Use extra caution when driving a fairway lounge vehicle with accessories. The vehicle may handle differently than it does without accessories.

Loading

Cargo or a trailer can change the stability and handling of a vehicle. You must use common sense and good judgment when carrying cargo or towing a trailer. Keep the following points in mind:

- Never exceed the weight limits shown on page 10-1. An overloaded fairway lounge vehicle can be unstable.
- Do not exceed the maximum tongue weight. You can measure tongue weight with a bathroom scale. Put the tongue of the loaded trailer on the scale with the tongue at hitch height. Adjust the load in the trailer, if necessary, to reduce the weight on hitch. If you are carrying cargo and towing a trailer, include the tongue weight in the maximum vehicle load limit.
- Load cargo in the display cabinet as close to the center of the vehicle as possible.
- Cargo should always be secured in the trailer. Make sure cargo in the trailer cannot move around. A shifting load can cause an accident.



SAFETY CONSIDERATIONS

4

- Make sure the load does not interfere with controls or your ability to see where you are going.
- Drive more slowly than you would without a load. The more weight you carry, the slower you should go. Although conditions vary, it is good practice not to exceed low range whenever you are carrying heavier loads or when towing a trailer.
- Allow more braking distance. A heavier vehicle takes longer to stop.
- Avoid making sharp turns unless at very slow speeds.
- Avoid hills and rough terrain. Choose terrain carefully. Added weight affects the stability and handling of the vehicle.

WARNING

- **Overloading this vehicle or carrying or towing cargo improperly could result in a hazard.**
- **This could cause changes in vehicle handling which could lead to an accident.**
- **Never exceed the stated load capacity for this vehicle.**
- **Cargo should be properly distributed and securely attached.**
- **Reduce speed when carrying cargo or pulling a trailer. Allow greater distance for braking.**

MAINTENANCE REQUIRED FOR UTILITY VEHICLE SAFETY

Practice the following to help ensure the safety of vehicle operators:

- **Preventative Maintenance.** Perform all scheduled maintenance in accordance with manufacturer's recommendations to provide a safe, properly operating vehicle.
- **Personnel.** Allow only qualified, trained, and authorized personnel to inspect, adjust and maintain vehicles.
- **Parts and Materials.** Use only replacement parts and materials recommended by the manufacturer.
- **Ventilation.** Properly ventilate all maintenance and storage areas in accordance with applicable fire codes and ordinances to avoid fire hazards. Ventilation is required to remove flammable vapors and fumes from gasoline powered vehicle storage areas. Ventilation is also required to remove hydrogen gas from the vehicle storage areas during the battery charging process.



SAFETY CONSIDERATIONS

SAFETY PRECAUTIONS DURING MAINTENANCE

When performing maintenance, follow all safety instructions contained in the manufacturer's operation and service manuals, as well as the following safety procedures:

- Properly immobilize vehicle before beginning any maintenance to avoid any unexpected vehicle movement.
- Properly block chassis before working underneath vehicle to avoid any unexpected vehicle movement.
- Before disconnecting any part of the fuel system, drain the applicable part of the system to prevent fuel leaks.
- When working on the fuel system or the battery, do not smoke, or allow any sparks or open flames near the vehicle, to avoid any fires or explosions.
- Before performing any maintenance, disable the vehicle's electrical system in accordance with the manufacturer's instructions.
- Use only properly insulated tools when working around batteries to avoid electrical shock or damage to the electrical system.
- Maintain all safety devices including brakes, steering mechanisms, warning devices and governors, in a safe operating condition. Do not modify these safety devices as supplied by the manufacturer.
- After each maintenance or repair, the car must be driven by a qualified, trained and authorized person – in an area free of pedestrian traffic – to ensure proper operation and adjustment.





- Record all maintenance performed in a maintenance record log by date, name of person performing maintenance and type of maintenance. Periodically inspect maintenance log to ensure accurate and complete entries.
- Provide operator comment cards to assist in identifying non-periodic maintenance needs for specific vehicles.
- Maintain, in a legible condition, all nameplates, warnings and instructions provided by the manufacturer.
- If new nameplates, warnings or instructions are needed, contact your Yamaha dealer.

FUEL HANDLING/STORAGE

Take the following precautions to ensure maintenance worker safety:


- Supervise the storage and handling of liquid fuels in accordance with applicable fire and safety requirements to avoid any fires or explosions.
- Only use battery charging facilities and procedures that are in accordance with applicable ordinances and regulations to avoid explosions, electrical shock or damage to the electrical system.
- Periodically inspect fueling to be certain that applicable safety codes, regulations and procedures are being followed to avoid any fires or explosions.

CONTROLS

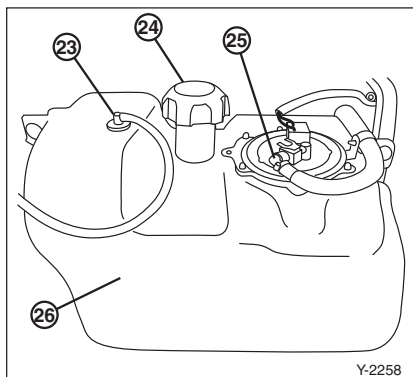
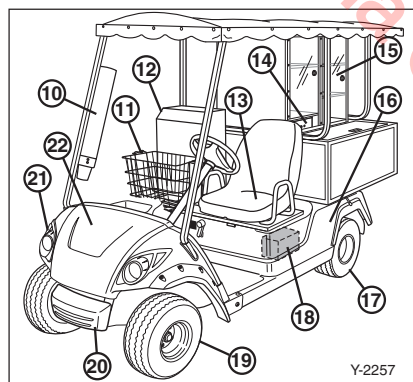
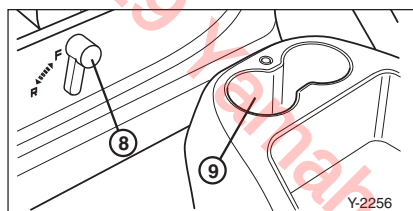
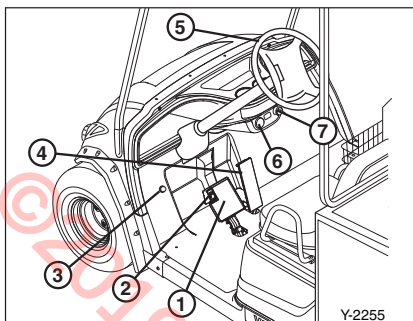


FEATURES

- | | |
|-------------------------|--------------------|
| ① Brake pedal | ⑭ Cash drawer |
| ② Parking brake pedal | ⑮ Display cabinet |
| ③ Horn switch | ⑯ Rear body |
| ④ Accelerator pedal | ⑰ Rear tire |
| ⑤ Steering wheel | ⑱ Battery |
| ⑥ Fuel gauge/hour meter | ⑲ Front tire |
| ⑦ Main/headlight switch | ⑳ Front bumper |
| ⑧ Drive select lever | ㉑ Headlights |
| ⑨ Cup holders | ㉒ Front body |
| ⑩ Cup dispenser | ㉓ Fuel tank vent |
| ⑪ Storage basket | ㉔ Fuel cap |
| ⑫ Beverage dispenser | ㉕ E.F.I. fuel pump |
| ⑬ Seat | ㉖ Fuel tank |
| | ㉗ Trash container |
| | ㉘ 2\"/> |

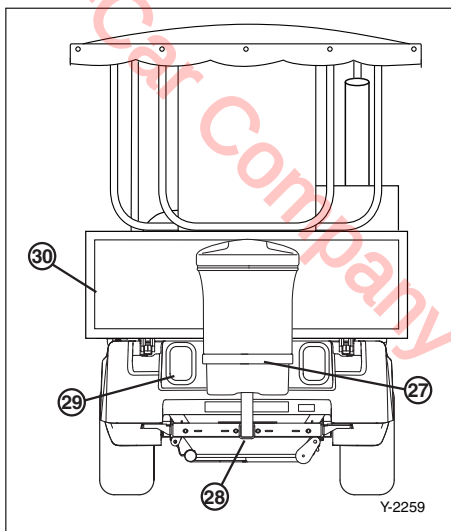

CONTROLS

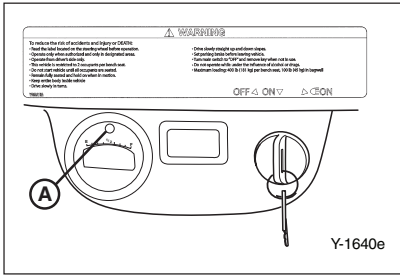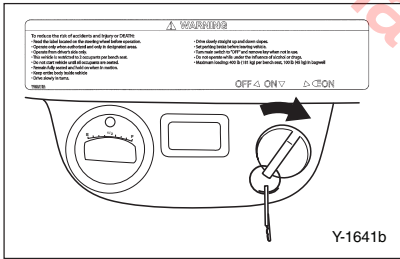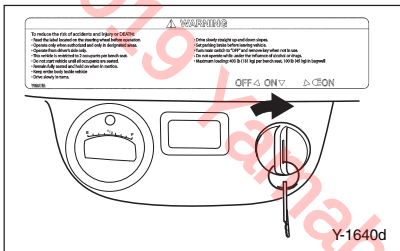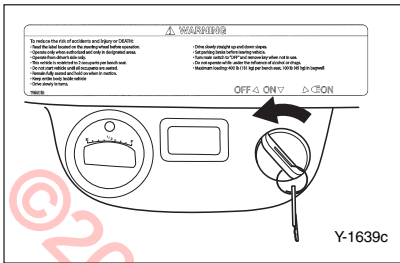

MAIN SWITCH

The main switch controls the following items:

“OFF”

The electrical power circuit is switched off. The key can be removed only in this position.

“ON”

The electrical power circuit is switched on. The vehicle can be driven.

“ON” WITH LIGHTS

The functions for this position are the same as for the ON position; however, this position will activate the headlights and taillights.

ENGINE/OIL WARNING LIGHT

When the engine oil level falls below an acceptable level, this light comes on.

NOTICE

If the light comes on, stop the engine, check the engine oil level and add oil as necessary.


When the engine/oil warning light is flashing while the key is on, there may be a problem with the fuel injection system, which may affect performance, emissions and fuel economy or cause damage to the fuel injection system or engine.

NOTICE

If the light is flashing, do not operate the vehicle. Contact your Yamaha Service representative to have the vehicle serviced.

Ⓐ Engine/oil warning light

CONTROLS

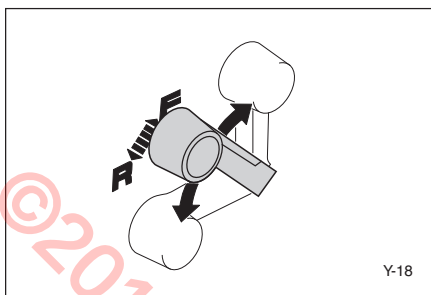

DRIVE SELECT LEVER



The drive select lever is used to shift the vehicle into forward or reverse. After coming to a complete stop, move the lever to the desired position.

Lever Position	Car Movement
F	FORWARD
R	REVERSE

TIP

The reverse alarm will beep when the drive select lever is turned to "R."

5

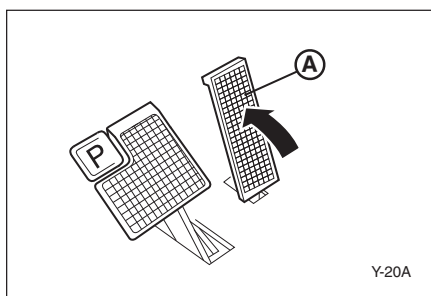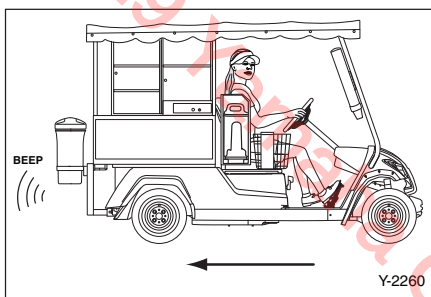


ACCELERATOR PEDAL

The accelerator pedal controls the vehicle's speed.

Action	Car Speed
Depress pedal	Increase
Release pedal	Decrease

Ⓐ Accelerator pedal

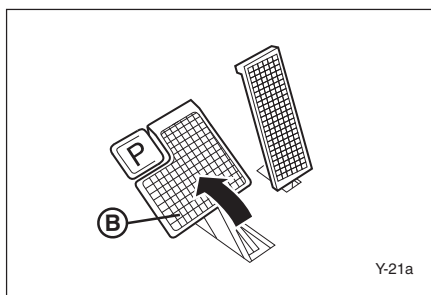


BRAKE PEDAL

Press down on the brake pedal to stop the vehicle.

Ⓑ Brake pedal

CONTROLS

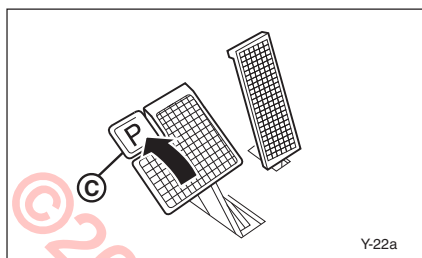

PARKING BRAKE PEDAL

Press down on the parking brake pedal whenever parking the vehicle.

© Parking brake pedal


TIP

Release the parking brake by depressing the accelerator pedal.

⚠ WARNING


The parking brake will automatically release when the accelerator pedal is depressed. If the main switch is in the "ON" position, depressing the accelerator may suddenly cause the vehicle to move. Death or serious personal injury can result from failing to comply with warning instructions in this manual.

5

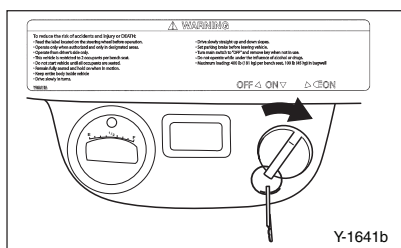

HEADLIGHT/TAILLIGHT ON POSITION

Turn the main switch all the way to the right to the second ON position. This will activate the headlights and taillights.

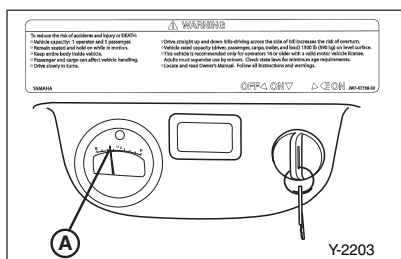


FUEL GAUGE

The fuel gauge displays the fuel level in the fuel tank. The fuel gauge will only work when the key is in the ON position.

Ⓐ Fuel gauge

CONTROLS

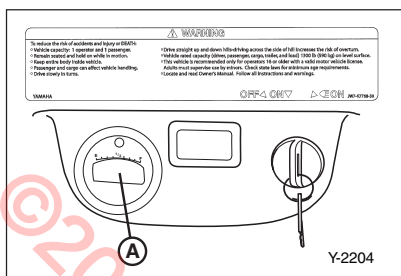

HOURLY METER

The hour meter displays the total number of hours the vehicle has been run. Use the hour meter to determine when scheduled maintenance is due.

Ⓐ Hour meter

HORN SWITCH

The horn is located adjacent to the brake pedal, and is activated by depressing with your foot.

Ⓑ Horn switch

TIP

It is advisable to beep the horn when approaching blind corners.

DISPLAY CABINET

This vehicle is equipped with a display cabinet that has seven individual storage compartments with durable locking doors.

Maximum load limit:
11 kg (25 lb)

CASH DRAWER

The display cabinet contains a sturdy steel cash drawer that is both removable and lockable.

CONTROLS


COLD STORAGE COMPARTMENT

The cold storage compartment is located behind the driver side seat and can hold up to 16 cases of canned drinks plus ice. This storage compartment is also fitted with a bottom-mounted drain with shutoff valve.

2" RECEIVER

This vehicle is equipped with a 5 cm (2 in.) receiver bracket. The receiver allows you to connect a variety of pull-behind refreshment accessories.

Ⓐ Receiver

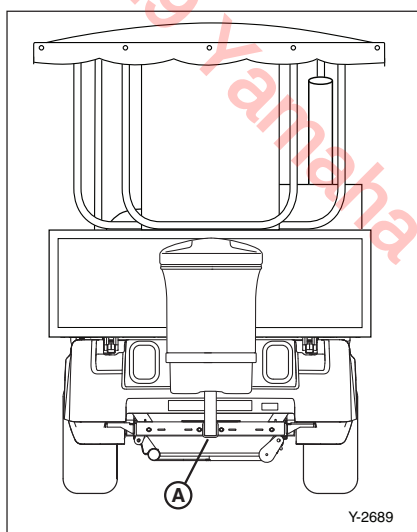

PRE-OPERATION CHECKS

Pre-operation checks should be made each time you use your vehicle. Get in the habit of performing the following checks in the same way so that they become second nature.

⚠ WARNING

To keep vehicle from moving while performing pre-operation checks:

- Remove main switch key.
- Apply parking brake.

Death or serious personal injury can result from failing to comply with warning instructions in this manual.

PRE-OPERATION CHECKLIST

Before each use check the following:


- ✓ Fuel system
- ✓ Engine oil level
- ✓ Battery
- ✓ Tire condition
- ✓ Steering system
- ✓ Reverse alarm
- ✓ Pedal operation
- ✓ Body and chassis
- ✓ Headlights/Taillights
- ✓ Display cabinet

SEAT

Open the seat for checking and servicing.



PRE-OPERATION CHECKS

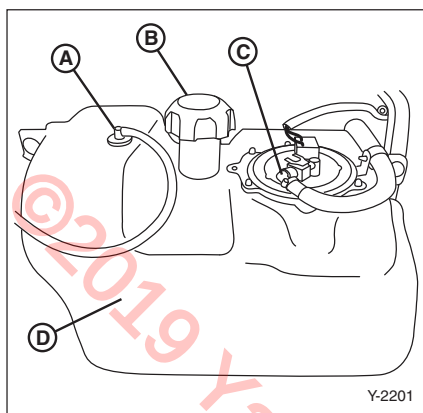

FUEL SYSTEM

Make sure there is sufficient fuel in the tank and that the fuel shutoff valve is open. Also check fuel line and connections for leakage.

- Ⓐ Fuel tank vent
- Ⓑ Fuel cap
- Ⓒ E.F.I. fuel pump
- Ⓓ Fuel tank

⚠ WARNING

Gasoline and its vapors are highly flammable and explosive. To avoid fires and explosions and to reduce the risk of injury when refueling, follow these instructions.

1. Stop engine and allow it to cool for several minutes before refueling.
Do not smoke when refueling and keep away from sparks, flames or other sources of ignition.
Refuel in a well-ventilated area.
2. Take care not to spill gasoline. If gasoline spills, wipe it up immediately with dry rags. Always dispose of gasoline-soaked rags properly.
3. Tighten the filler cap securely after refueling.

⚠ WARNING

Gasoline is poisonous and can cause injury or death. If you swallow gasoline, inhale a lot of gasoline vapor or get gasoline in your eyes, get immediate medical attention.




If any gasoline gets on your skin, immediately wash with soap and water. Change clothing if gasoline spills on it.

Recommended fuel:
Unleaded gasoline

Fuel tank capacity:
22.0 L
(5.8 US gal)

Gasoline-based fuels containing more than 10% ethanol are not recommended.

PRE-OPERATION CHECKS

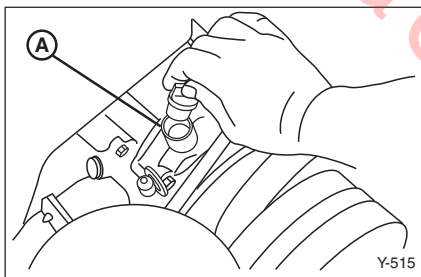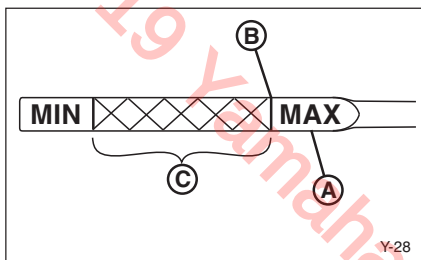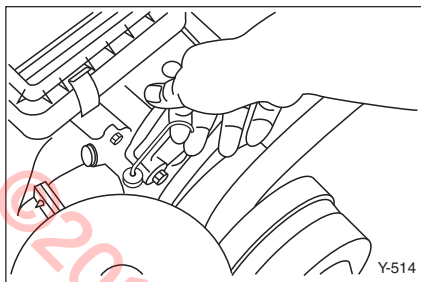

Recommended oil:
YAMALUBE 4 cycle oil or
SAE 10W40

Engine oil capacity:
1.0 L, 1000 cc
(1.0 US qt)

Oil change quantity:
1.0 L, 1000 cc
(1.0 US qt)

NOTICE

Avoid using gasoline blended with methyl alcohol which can damage fuel system parts.

ENGINE OIL

With the vehicle parked on level ground, remove the dipstick and make sure the engine oil is between the MIN and MAX marks (the crosshatched area on the end of the dipstick).

- (A) Oil level dipstick
- (B) Maximum oil level
- (C) Safe operating range

If the oil level is **below** the MIN mark on the dipstick, add oil through the oil filler hole until the oil level is between the MIN and MAX marks.

- (A) Oil filler hole

NOTICE

Engine damage can result.

- Use care not to fill past the MAX dipstick mark, and be sure no foreign material enters the crankcase.
- Use care not to get oil on the starter belt.


TIP

The distance between the dipstick marks represents approx. 1/2 L (1/2 US qt) of oil.

TIP

Recommended engine oil classification: API Service SE, SF, or SG. Engine oils labeled "Energy Conserving II" are recommended.

PRE-OPERATION CHECKS

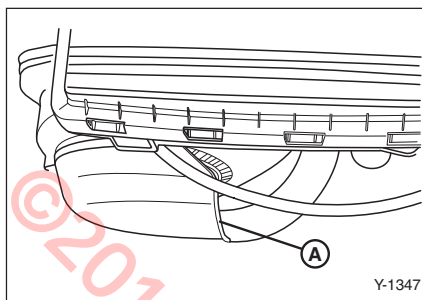

Engine Cooling Inlet Duct

Check the engine cooling inlet duct for debris. Remove any debris present.


- Ⓐ Engine cooling inlet duct

BATTERY

Check that the battery is held securely in place to prevent the battery from being damaged from vibration or jarring. Also check that no battery caps are missing to prevent battery acid from spilling from the battery. Check the battery terminals for corrosion.

⚠ WARNING

Battery electrolyte is poisonous and dangerous, causing severe burns, etc. It contains sulfuric acid. Avoid contact with skin, eyes or clothing. Ventilate when charging or using in enclosed space. Always shield eyes when working near batteries. KEEP OUT OF REACH OF CHILDREN.

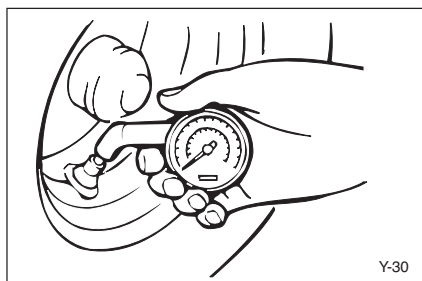

TIRE CONDITION

Tire Air Pressure


Check the tire air pressure before operating the vehicle.

Tire pressure:

Front: 140-160 kPa,
1.4-1.6 kgf/cm² (20-23 psi)

Rear: 197-217 kPa,
2.0-2.2 kgf/cm² (29-31 psi)

PRE-OPERATION CHECKS

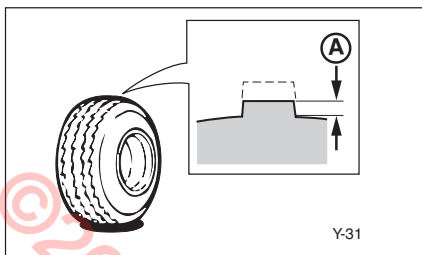

Tire Wear Limit

Check the tire surface for damage, cracks or embedded objects. When tire tread wears down to 1 mm (0.04 in.), replace the tire.

- Ⓐ Wear limit

STEERING SYSTEM

Check the steering system for excessive free play by:

- moving the steering wheel up and down, and back and forth.
- turning the steering wheel slightly to the right and left.

If you feel excessive free play, or hear rattling sounds which may indicate loose steering components, consult a Yamaha dealer.

REVERSE ALARM

Check the reverse alarm by moving the drive select lever to “R” for reverse. The alarm should sound.

PEDAL OPERATION



Check the following pedal controls for proper operation. If a pedal does not work properly, consult a Yamaha dealer.

Accelerator Pedal


⚠ WARNING

With the main switch in the “OFF” position, make sure the accelerator pedal operates smoothly.

- Ⓐ Accelerator pedal

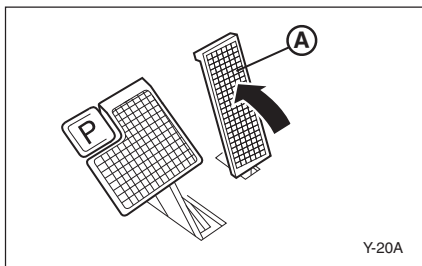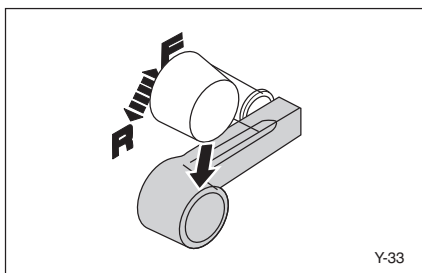


PRE-OPERATION CHECKS

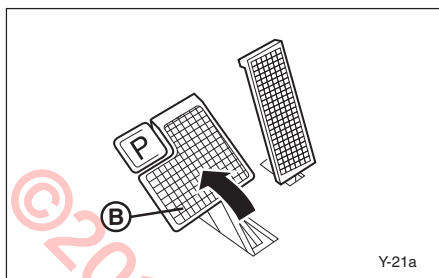

Brake Pedal

Make sure the brake pedal feels firm when pressed and returns to its original position when released.

- Ⓑ Brake pedal

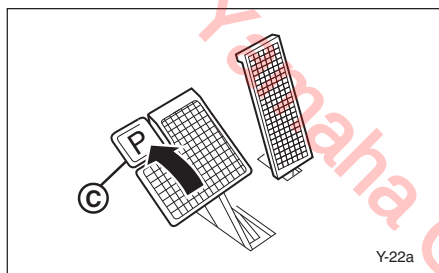

Parking Brake Pedal

Make sure the parking brake pedal locks in place with a positive click, and releases when the accelerator pedal is pressed.

- Ⓒ Parking brake pedal

TIP

Release the parking brake by depressing the accelerator pedal.


6

BODY AND CHASSIS


Before each use, visually inspect the vehicle body and chassis for damage and/or missing parts.

DISPLAY CABINET

Before each use, visually inspect cabinets and coolers to ensure they are properly closed and secure.

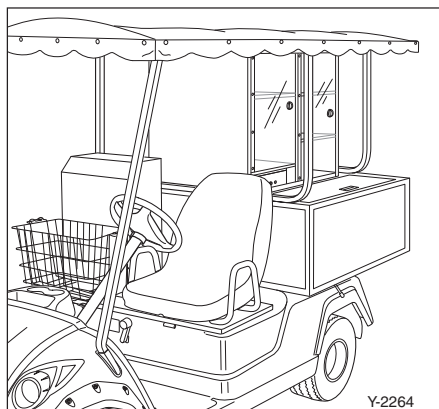

PRE-OPERATION CHECKS

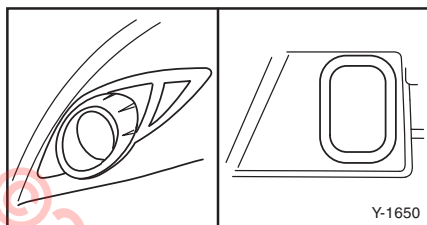

Headlights/Taillights

Ensure the headlights and taillights are operational.


⚠ WARNING

Never operate the vehicle at night or during inclement weather without properly working headlights/taillights. Death or serious personal injury can result from failing to comply with warning instructions in this manual.

Horn Switch

Make sure the horn operates correctly.

Ⓐ Horn switch

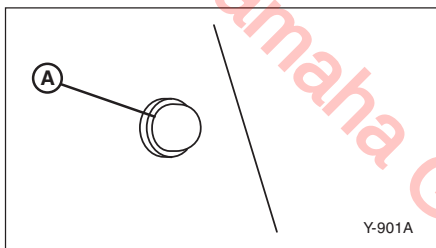

OPERATION

STARTING

1. With the parking brake applied, turn the drive select lever to "F" for forward, or "R" for reverse.

NOTICE

Do not shift from "F" forward to "R" reverse while the vehicle is moving. Transmission damage can result.

2. Turn the main switch to "ON."

WARNING





Do not depress the accelerator pedal when turning on the main switch or the vehicle may start moving unexpectedly. Death or serious personal injury can result from failing to comply with the safety instructions in this manual.

3. Check that your path is clear in the direction you plan to go, and slowly depress the accelerator pedal. The vehicle will start to move.

Ⓑ Accelerator pedal

TIP

The parking brake automatically releases when the accelerator pedal is depressed.

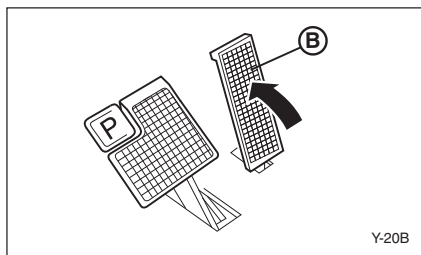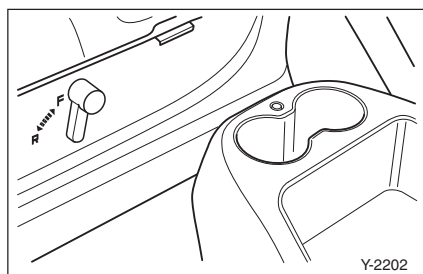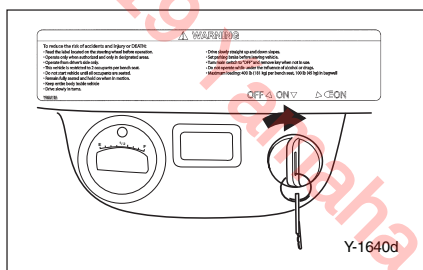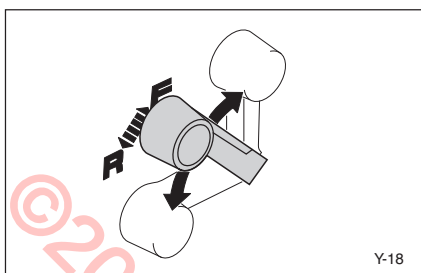


OPERATION

STOPPING

To stop the vehicle, gradually press down on the brake pedal.

NOTICE

Do not hold the vehicle on an incline with the accelerator – use the brake. Transmission damage can result.

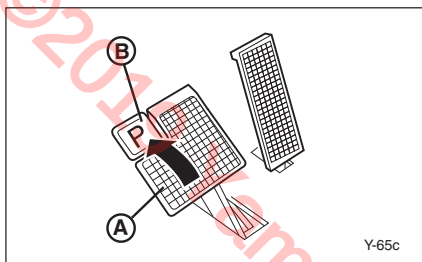

(A) Brake pedal

When the vehicle has come to a stop, apply the parking brake pedal and turn the main switch to “OFF.”

(B) Parking brake pedal

LOADING

Cargo or a trailer can change the stability and handling of a vehicle.

You must use common sense and good judgment when carrying cargo or towing a trailer. Keep the following points in mind:

- Never exceed the weight limits shown. An overloaded vehicle can be unstable.

MAXIMUM LOADING LIMIT

- Vehicle Rated Capacity:
590 kg (1300 lb)
- Cooler Storage Box Capacity:
363 kg (800 lb)
- Towing Capacity:
454 kg (1000 lb)
- Tongue Weight:
68 kg (150 lb)

OPERATION

- Do not exceed the maximum tongue weight. You can measure tongue weight with a bathroom scale. Put the tongue of the loaded trailer on the scale with the tongue at hitch height. Adjust the load in the trailer, if necessary, to reduce the weight on hitch. If you are carrying cargo and towing a trailer, include the tongue weight in the maximum vehicle load limit.
- Drive more slowly than you would without a load. The more weight you carry, the slower you should go.
- Allow more braking distance. A heavier vehicle takes longer to stop.
- Avoid making sharp turns unless at very slow speeds.
- Avoid hills and rough terrain. Choose terrain carefully. Added weight affects the stability and handling of the vehicle.

WARNING

Uncontrolled Movement Hazard

- **Never exceed the stated load capacity for this vehicle.**
- **Distribute the load evenly.**
- **Never tow cargo that is not secured.**
- **Reduce speed and allow greater distances for braking.**

Death or serious personal injury can result from failing to comply with warning instructions in this manual.

MAINTENANCE

PERIODIC MAINTENANCE CHARTS

Regular maintenance is required for the best performance and safe operation of your vehicle.

⚠ WARNING

Be sure to turn off the main switch and apply the parking brake when you perform maintenance, unless otherwise specified. If the owner is not familiar with servicing the machine, death or serious personal injury can result. When in doubt the work should be done by a Yamaha dealer or other qualified mechanic.

CS - CHECK CA - CHECK AND ADJUST R - REPLACE S - SERVICE CL - CLEAN AND LUBRICATE L - LUBRICATE

	Remarks	Daily Pre- Operation	20 hours 160 kms 100 miles (Every month)	125 hrs 1000 kms 600 mls (Every 6 months)	250 hrs 2000 kms 1200 mls (Every year)	500 hrs 4000 kms 2500 mls (Every 2 years)	1000 hrs 8000 kms 5000 mls (Every 4 years)	Page
PRE-OP	Check engine oil	CS	CS	CS				6-3
	Check air cooling duct	CS	CS	CS	CS	CS	CS	6-4
	Check fuel lines for leakage	CS	CS	CS	CS	CS	CS	6-2
	Check fuel level	CS	CS	CS	CS	CS	CS	6-2
	Check for looseness and corrosion of battery terminals and hold downs	CS	CS	CS	CS	CS	CS	6-4
	Check brake pedal free play and adjust if necessary	CS	CA	CA	CA	CA	CA	8-12
	Check steering operation	CS	CS	CS	CS	CS		6-5
	Check tire pressure, tread depth, tire surface for damage	CS	CA	CA	CA	CA	CA	6-4
	Check body and chassis for damage	CS	CS	CS	CS	CS	CS	6-6
	Check tightness of all bolts, nuts, screws and rivets	CS	CS	CS	CS	CS	CS	*
EVERY MONTH	Check reverse alarm operation	CS	CS	CS	CS	CS	CS	6-5
	Check fuel filter for clogging		CS	CS	CS	CS	CS	*
	Check wear of drive belt		CS	CS	CS	CS	CS	8-7/ 8-8
	Check operation of Forward / Reverse shifting		CS	CS	CS	CS	CS	7-1
	Clean / Lube pedal control area		CL					-
EVERY 6 MONTHS	Wash pre-filter, check air cleaner element			S	S	S	S	8-6/ 8-7
	Check spark plug and plug cap condition** / Check compression			CS	CS	CS	CS	8-4
	Check shock absorbers for oil leaks and damaged springs			CS	CS	CS		*

* Items without a page number reference should be serviced by a Yamaha dealer or other qualified mechanic. This manual does not contain these procedures. They are contained in the Service Manual.

**Related to emission control system.

MAINTENANCE

CS - CHECK CA - CHECK AND ADJUST R - REPLACE S - SERVICE CL - CLEAN AND LUBRICATE L - LUBRICATE

	Remarks	Daily Pre- Operation	20 hours 160 kms 100 miles (Every month)	125 hrs 1000 kms 600 mls (Every 6 months)	250 hrs 2000 kms 1200 mls (Every year)	500 hrs 4000 kms 2500 mls (Every 2 years)	1000 hrs 8000 kms 5000 mls (Every 4 years)	Page
EVERY YEAR	Replace engine oil				R	R	R	8-5
	Adjust throttle cables,** choke cable, check carburetor throttle shaft for wear**				CA	CA	CA	*
	Check starter V-belt for damage and tension				CS	CS	CS	*
	Check drive belt for slippage, wear or scratches				CS	CS	CS	8-7/ 8-8
	Check operation of speed limiter				CS	CS	CS	*
	Apply battery terminal protectant				S	S	S	—
	Check wiring connections and insulation				CS	CS	CS	—
	Check rear axle bearing play for roughness or freeplay				CS	CS	CS	*
	Perform primary and secondary clutch maintenance: - Inspect sheaves for wear and damage - Inspect weights/rollers and bushings for wear (primary) - Inspect RAM shoes for wear (secondary) - Replace if necessary				CL	CL	CL	*
	Check steering knuckle bushing free play / Adjust wheel alignment				CA	CA	CA	*
	Check wheel nut tightness, front wheel bearing play				CS	CS	CS	*
	Check transaxle oil level and inspect for leakage				CS	CS	CS	8-10
	Check operation and adjust pedal stop if necessary				CA	CA	CA	*
EVERY 2 YEARS	Check brushes for wear and commutator for dirt					CS	S	*
EVERY 4 YEARS	Replace fuel filter and fuel hoses						R	*
	Check tightness of cylinder head / Adjust valves						CA	*
	Replace transaxle oil						R	*
	Inspect brake shoes and adjust or replace if necessary						CS R	*

* Items without a page number reference should be serviced by a Yamaha dealer or other qualified mechanic. This manual does not contain these procedures. They are contained in the Service Manual.

**Related to emission control system.

MAINTENANCE

EXHAUST EMISSION CONTROL SYSTEM AND COMPONENTS

Item	Abbreviation
• ELECTRONIC FUEL INJECTION	EFI
• ELECTRONIC CONTROL UNIT & PLUG, SPARK	ECU
• CRANKCASE 1 & HEAD, CYLINDER 1	PCV (Positive Crankcase Ventilation)
• AIR FILTER ASSY.	ACL (Air Cleaner)
• MUFFLER	MUFF., 2
• CARBON CANISTER	CC (California models only)
• INVERSION VALVE	IV

The above items and the corresponding abbreviations are provided in accordance with U.S. EPA REGULATIONS FOR SMALL NONROAD ENGINES and the CALIFORNIA REGULATIONS FOR NEW 1995 AND LATER OFF-HIGHWAY RECREATIONAL VEHICLES AND ENGINES.

The abbreviations conform to the latest version of the SAE's recommended practice document J1930, "Diagnostic Acronyms, Terms, and Definitions For Electrical/Electronic System."

It is recommended that these items be serviced by a Yamaha dealer or other qualified mechanic.

TROUBLESHOOTING

If the vehicle's engine will not start, use the following chart:

Cause	Remedy
Fuel System	
No fuel in tank	Fill fuel tank
Fuel pump inoperable	Consult Yamaha dealer
Clogged fuel line	Consult Yamaha dealer
Foreign matter in fuel filter	Clean fuel filter – Consult Yamaha dealer
Dirty injector	Consult Yamaha dealer
Electrical System	
Spark plug dirty with carbon, or wet	Clean carbon or wipe spark plug dry
Faulty ignition system	Consult Yamaha dealer


MAINTENANCE

Spark Plug Inspection

You should periodically remove and inspect the spark plug. Dirty or worn spark plugs can cause poor performance.

⚠ WARNING

When removing or installing the spark plug, be careful not to damage the insulator. A damaged insulator could allow external sparks, which could lead to explosion or fire. Death or serious personal injury can result from failing to comply with warning instructions in this manual.

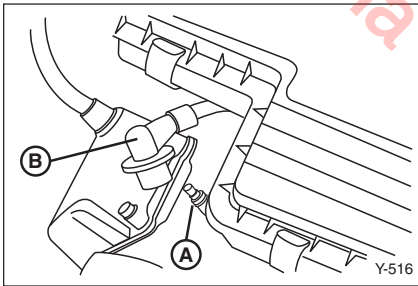

- (A) Spark plug
- (B) Spark plug cap

1. Check for discoloration and remove carbon deposits with a spark plug cleaner or wire brush. The normal electrode color will be tan.
2. Check the spark plug type, and check the spark plug gap with a feeler gauge.


Standard spark plug:
BPR2ES/BPR4ES

Spark plug gap:
0.7 ~ 0.8 mm (0.028 ~ 0.031 in.)

- (A) Gap

3. Clean the gasket and plug surfaces and install the spark plug finger-tight before tightening to the following torque:

Spark plug torque:
20 Nm, 2.0 m·kg
(14.5 ft·lb)

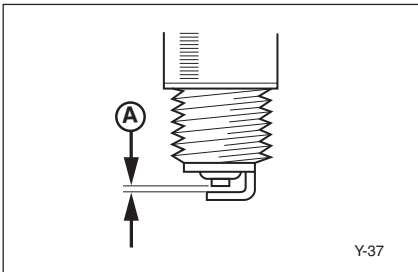

MAINTENANCE

Engine Oil Replacement

1. Warm up the engine for several minutes, place the vehicle on a level surface, then stop the engine.

⚠ WARNING

Use caution not to touch hot engine oil or hot engine parts, during the following procedure. Death or serious personal injury can result from failing to comply with warning instructions in this manual.

2. Place an oil pan under the engine drain plug.
3. Remove the oil drain plug and let the oil drain completely.

TIP

Dispose of used oil in an environmentally safe way, such as taking oil to an oil collection station.


4. Install the drain plug, along with a new drain plug gasket, finger-tight before tightening to the following torque:

Drain plug torque:
31 Nm, 3.1 m·kg
(23 ft·lb)

5. Add the correct quantity of oil through the oil filler hole.

TIP

Recommended engine oil classification: API Service SE, SF, or SG. Engine oils labeled "Energy Conserving II" are recommended.

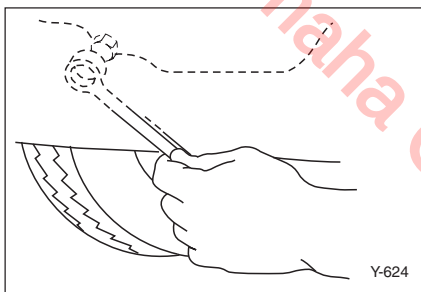


Recommended oil:
YAMALUBE 4 cycle oil or
SAE 10W40

Engine oil capacity:
1.0 L, 1000 cc
(1.0 US qt)

Oil change quantity:
1.0 L, 1000 cc
(1.0 US qt)

MAINTENANCE

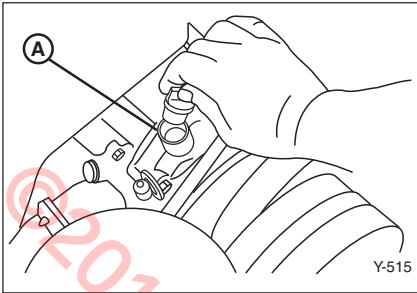


(A) Oil filler hole

NOTICE

Use care not to fill past the MAX dipstick mark, and be sure no foreign material enters the crankcase. Serious engine damage can result.

After replacing engine oil, check for oil leaks around the drain plug. If oil leaks are found, consult a Yamaha dealer.

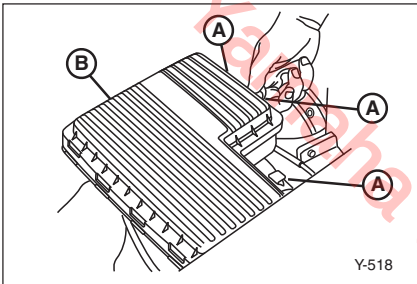

Air Filter


To remove the air filter elements:

1. Unlatch the air filter cover clips and remove cover.

(A) Air filter cover clips
(B) Air filter cover

2. Lift the air filter and pre-filter out of the air filter case.

(C) Air filter
(D) Pre-filter

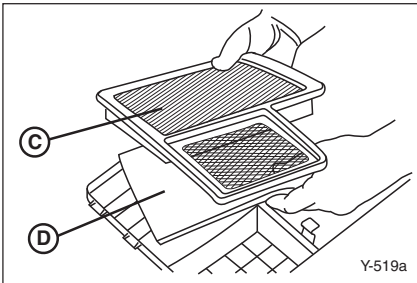

NOTICE


Be careful not to drop anything into the air inlet. Serious engine damage can result.

Inspection and cleaning:

3. Wash the foam pre-filter in soap and water. Allow it to dry.

(A) Soap and water
(B) Foam element

4. Check the filter element. If damaged or dirty, replace it.

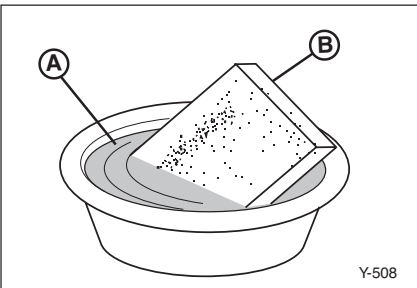

MAINTENANCE


NOTICE

Do not wring out the foam pre-filter; this could cause it to tear.

5. To replace the elements, reverse the above steps.

NOTICE

The pre-filter has a notch on one side. It will only fit in the case one way. Serious engine damage can result from an improperly positioned filter.

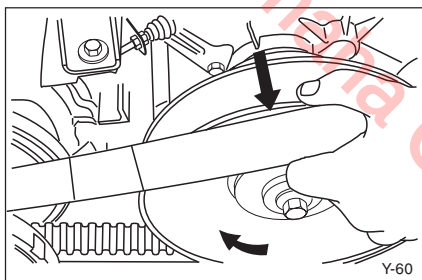

Drive Belt

To remove the drive belt:


1. Set the drive select lever halfway between forward and reverse.
2. Pull up on the drive belt and push it outward over the edge of the secondary sheave.
3. Turn the secondary sheave clockwise and the drive belt will roll off the sheave.
4. Remove the drive belt from the primary sheave.

Inspection:

To inspect the drive belt, check for frayed edges or tears, and measure drive belt against the following specification. If the belt shows excessive wear or damage, replace the belt with a new one.

- Ⓐ New: 31.0 mm (1.22 in.)
- Ⓑ Replace when belt reaches: 29.2 mm (1.15 in.)

5. To install the drive belt, reverse the above steps, rolling the belt back over the secondary sheave.



MAINTENANCE

Clutch

Maintenance is required each year for proper drive operation. Refer to the Periodic Maintenance chart in this owner's manual.

Battery

The 12-volt battery that provides starting power to your gas vehicle normally does not require the addition of water. If the battery loses its charge, have an experienced mechanic charge it.

⚠ WARNING

Battery electrolyte is poisonous and dangerous, causing severe burns, etc. It contains sulfuric acid. Avoid contact with skin, eyes, or clothing.

Antidote:

EXTERNAL: Flush with water.


INTERNAL: Drink large quantities of water or milk. Follow with milk of magnesia, beaten egg, or vegetable oil. Call physician immediately.

EYES: Flush with water for 15 minutes and get prompt medical attention.

Batteries produce explosive gases. Keep sparks, flame, cigarettes, etc., away.

Ventilate when charging or using in enclosed space. Always shield eyes when working near batteries.

KEEP OUT OF REACH OF CHILDREN.

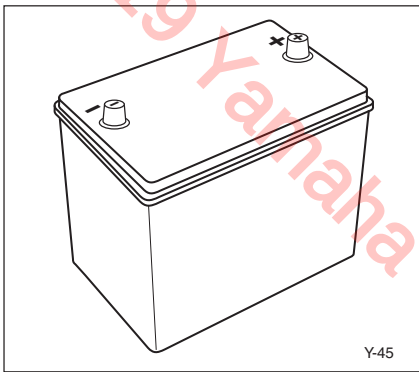

MAINTENANCE

Fuse Replacement

⚠ WARNING



Be sure to use the specified fuse. Using a wrong fuse can cause electrical system damage and create a fire hazard. Death or serious personal injury can result from failing to comply with the warning labels in this manual.

NOTICE

When replacing a fuse, be sure the main switch is turned off to prevent accidental short-circuiting and electrical system damage.

1. Locate the in-line fuse holder on the main wire harness adjacent to the tow switch.
2. Pull fuse holder cover off.
3. Pull fuse out, inspect and replace if necessary.

Ⓐ Fuse holder

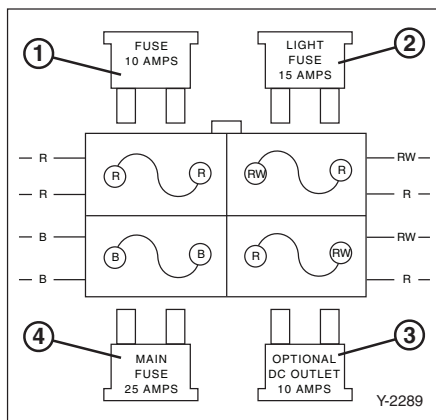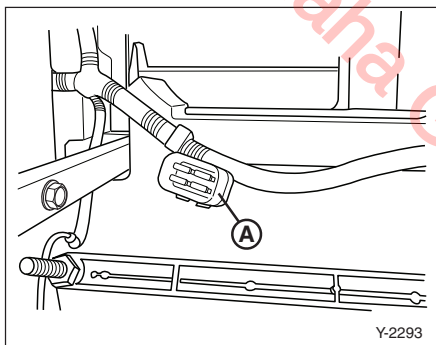

Fuse Type:

- ① DC Outlet Fuse (10A), Blade Style
 - ② Light Fuse (15A), Blade Style
 - ③ Fuse (10A), Blade Style
 - ④ 25 Amp, Blade Style (MAIN)
- Fuse location off of negative battery terminal @ 15 cm (6 in.)

MAINTENANCE

Transaxle Oil

To check transaxle oil level:

1. Place the vehicle on a flat, level surface.
2. Place an oil pan under the transaxle case.
3. Clean area around servicing plug (A) and vent cap (B).
4. Remove transaxle oil servicing plug and vent cap located on the rear of the transaxle case.
5. Transaxle oil should be at the top of the oil servicing hole or just beginning to run out of hole.



NOTICE

Do not allow foreign material to enter transaxle. Serious transaxle damage can result.

6. If needed, add Yamalube Shaft Drive Gear Oil until it is at the top of the plug hole or just beginning to run out of servicing hole (A).
7. Install the transaxle servicing plug and tighten to 14-19 Nm, 1.4-1.9 m·kg (124-168 in·lb).
8. Install the vent cap.

TIP


For transaxle oil replacement, consult a Yamaha dealer or other qualified mechanic.

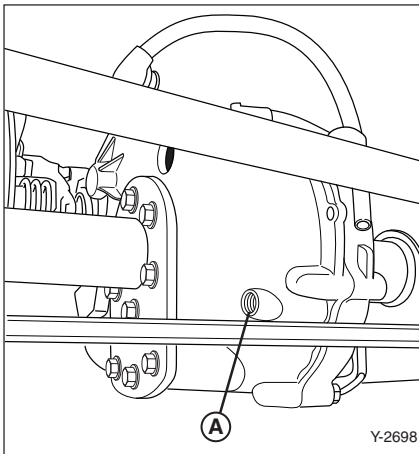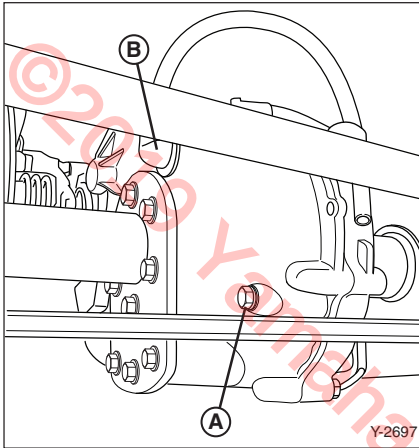

Recommended oil:
Yamalube Shaft Drive Gear Oil

Gearcase capacity:
Yamalube Shaft Drive Gear Oil/
800 mL, 800 cc (0.9 US qt)

MAINTENANCE

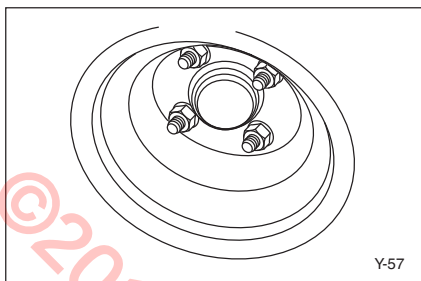

Wheel nut tightening torque:
80 Nm, 8.0 m·kg (58 ft·lb)

NOTICE

Before performing wheel or brake maintenance, verify that the main switch is in the “OFF” position. Serious transaxle damage can result.

Wheel Replacement

To remove and install a wheel on your vehicle:

1. With the wheels blocked to prevent the vehicle from moving, loosen the wheel nuts.
2. Elevate the vehicle with a jack and remove the wheel nuts and the wheel.
3. Reverse the removal steps when installing the wheel.

Brake Adjustment

The brakes on your vehicle are self-adjusting.

Before you operate the vehicle, press down on the brake pedal several times to make sure the brakes are functioning properly.

⚠ WARNING

Consult your Yamaha dealer before using your vehicle if you suspect brake problems. Death or serious personal injury can result from failing to comply with warning instructions in this manual.

MAINTENANCE

Brake Pedal Free Play Adjustment

NOTICE

Before adjusting brake pedal free play, pump the brake pedal several times to self-adjust the brakes.

Check the brake pedal free play by pressing against the pedal with two fingers (using light force) and measuring the distance the pedal travels before resistance is felt.

Brake pedal free play (a):
20-25 mm (0.79-0.99 in.)




To adjust the brake pedal free play:

1. Remove the floor mat and service lid from the floor of the vehicle.
2. If the free play distance needs adjusting, loosen the lock nut (A) and turn the adjusting nut (B) in or out until the free play specification is met. Then tighten the lock nut in place.



NOTICE

Do not over-tighten the brake cables. Over-tightening will increase brake wear and affect overall performance of vehicle. Premature brake wear can result.

Tightening torque:
17 Nm, 1.7 m·kg (12 ft·lb)

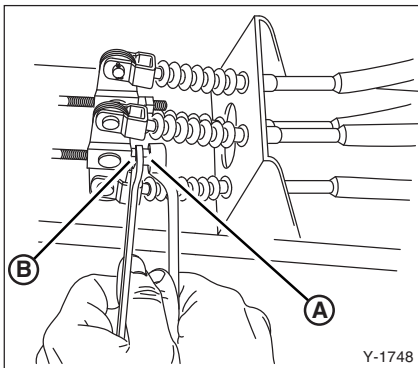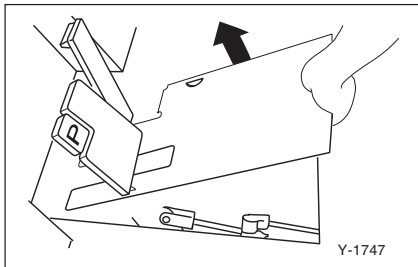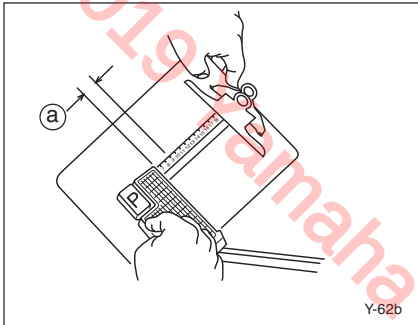

MAINTENANCE

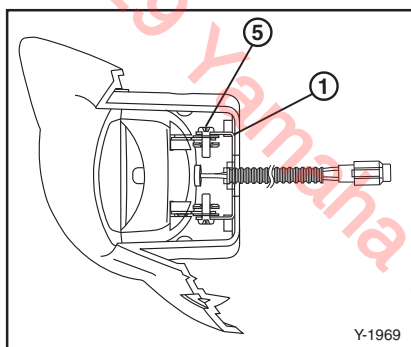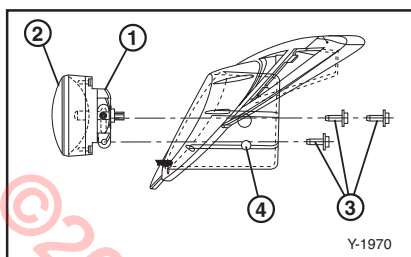

Replacing a Headlight Bulb

If the headlight burns out replace it as follows:


1. Remove the bulb holder (1) and bulb (2) by removing the three screws (3) located on the back of the bezel (4).
2. Disconnect the wire connectors from the bulb.
3. Remove the two screws (5) located on the side of the bulb holder (1) to gain access to the headlight bulb (2).
4. Insert a new bulb (2) into the bulb holder (1) and secure with the two bulb holder screws (5). Torque to 3 ~ 4.5 Nm, 0.3 ~ 0.45 m•kg (27 ~ 40 in•lb).
5. Reattach the bulb holder (1) to the bezel (4) and torque to 3 ~ 4.5 Nm, 0.3 ~ 0.45 m•kg (27 ~ 40 in•lb).

MAINTENANCE

Adjusting a Headlight

NOTICE

It is recommended to have the headlight adjustment performed by a Yamaha dealer.

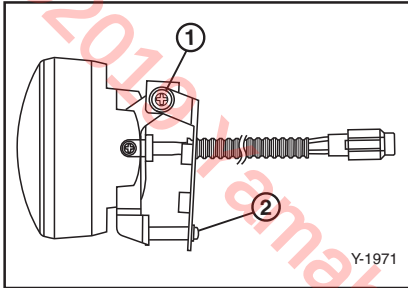

1. Loosen the two screws ① for the headlight bulb bracket. Do not remove the screws, just loosen them.


TIP

The screws can be accessed from under the fender through the access holes on the sides of the headlight bezel.

2. Using a Phillips head screwdriver, turn the adjusting screw ②. Turning the screw clockwise will lower the beam and turning the screw counterclockwise will raise the beam.
3. Once the correct adjustment has been made, tighten the screws ① to 3 ~ 4.5 Nm, 0.3 ~ 0.45 m·kg (27 ~ 40 in·lb).

8

Replacing a Taillight Bulb

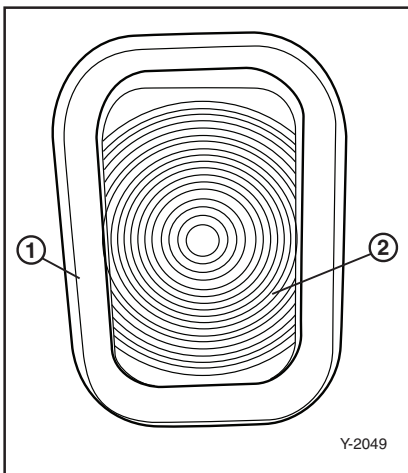

1. Disconnect the wire connector from the taillight.
2. Pull the rubber seal ① away from the body while pushing on the back of the taillight ②.
3. Remove the seal ① and the taillight ②.
4. Install the rubber seal into the body first.
5. Carefully push the new taillight into the seal. Make sure the seal stays seated in the rear body and the taillight is seated properly in the groove in the rubber seal.
6. Connect the wire connector.

STORAGE

Perform the following preparations when storing your vehicle for extended periods of time:

TIP

Turn main switch key to the “OFF” position, remove key, and store key in a safe place.

FUEL

WARNING

Gasoline and its vapors are highly flammable and explosive. To avoid fire or explosions and reduce the risk of injury, follow these instructions.

- Do not smoke when draining fuel and keep away from sparks, flames, or other sources of ignition.
- Stop engine and allow it to cool for several minutes before draining fuel.
- Drain fuel in a well-ventilated area.
- Take care not to spill gasoline. If gasoline spills, wipe it up immediately with dry rags. Always dispose of gasoline-soaked rags properly.
- Tighten the filler cap securely after checking fuel level to avoid leaking.
- If you inhale a lot of gasoline vapor, or get gasoline in your eyes, get immediate medical attention.
- If any gasoline gets on your skin, immediately wash with soap and water. Change clothing if gasoline spills on it.

1. Fill the fuel tank with fresh fuel and add the specified amount of Fuel Med RX, which is available from your Yamaha dealer, or equivalent product.
2. Operate the vehicle for at least five minutes to distribute treated fuel through the fuel system.

Specified amount:

7.5 cc of stabilizer for each liter of fuel (1 oz. of stabilizer for each gallon of fuel)

TIP

Use of fuel stabilizer and conditioner eliminates the need to drain the fuel system. Consult a Yamaha dealer if the fuel system needs to be drained instead.

ENGINE PREPARATION

With the key removed and the spark plug lead disconnected, turn the clutch by hand until compression is felt. This puts the valves in the closed position.

CHASSIS PREPARATION

1. Verify the tire pressure is set to:
Front: 140-160 kPa,
1.4-1.6 kgf/cm² (20-23 psi);
Rear: 197-217 kPa,
2.0-2.2 kgf/cm² (29-31 psi).
2. Clean exterior of the vehicle and apply a rust inhibitor.
3. Cover the vehicle with a breathable cover and store it in a dry, well-ventilated area.

BATTERY PREPARATION

1. Remove the battery from the vehicle and store it in a cool, dry place that stays between 0°C (32°F) and 30°C (90°F).

2. Have the battery recharged every 60-90 days to keep it fully charged. The battery must be kept fully charged to avoid damage.
3. Batteries like the one supplied with your vehicle normally do not require you to check the water level inside the battery for the one-year warranty period provided by the manufacturer.

NOTICE

Do not allow cleaning solution to enter battery cells. Serious battery damage can result.

4. Clean the top of the battery with a solution of baking soda and water, as necessary, to remove corrosion.

SPECIFICATIONS

GENERAL SPECIFICATIONS

Items	Fairway Lounge
Dimensions:	
Overall length	2743 mm (108.0 in.)
Overall width	1252 mm (49.3 in.)
Overall height (with canvas canopy)	1825 mm (72.5 in.)
Height of floor	300 mm (11.8 in.)
Wheelbase	1917 mm (75.5 in.)
Tread:	
Front	990 mm (39.0 in.)
Rear	980 mm (38.6 in.)
Display cabinet size	
Overall length	914 mm (36.0 in.)
Overall width	425 mm (16.75 in.)
Overall height	635 mm (25.0 in.)
Minimum ground clearance	115 mm (4.5 in.)
Weight:	
Dry weight (without battery)	471 kg (1038 lb)
Performance:	
Factory speed setting	25.0 km/h (15.5 mph)
Maximum speed	25.0 km/h (15.5 mph)
Minimum turning radius	2.8 m (9.2 ft)
Seating capacity	One occupant
Vehicle rated capacity	590 kg (1300 lb)
Towing capacity	454 kg (1000 lb)
Tongue weight	68 kg (150 lb)
Fuel tank capacity	22.0 L (5.8 US gal)

SPECIFICATIONS

ENGINE

Items	Fairway Lounge
Description:	
Engine type	4-stroke, Gasoline, 60° incline OHV
Number of cylinders	Single
Displacement	357 cm³
Bore x stroke	85 x 63 mm (3.30 x 2.48 in.)
Compression ratio	8.1:1
Rated output	8.5 kw/3500 rpm/11.4 hp
Cooling system	Forced air-cooled
Starting system	Electric-Starter/Generator
Ignition system	TCI Magneto
Spark plug type	BPR2ES/BPR4ES
Spark plug gap	0.7-0.8 mm (0.028-0.031 in.)
Lubrication system	Splash-style positive oil lubrication
Engine oil type	YAMALUBE 4 cycle oil or SAE 10W40
Engine oil capacity	1.0 L, 1000 cc (1.0 US qt)
Oil change quantity	1.0 L, 1000 cc (1.0 US qt)

TRANSMISSION

Items	Fairway Lounge
Transmission:	
Type	V-belt automatic centrifugal engagement
V-belt width and outer line length	31 x 1010 mm (1.22 x 39.76 in.)
V-belt wear limit	29.2 mm (1.15 in.)
Governor:	
Type	Oil bath flyweight
Factory speed setting	25.7 km/h (16 mph)
Differential/reduction gear:	
Differential type	Bevel gear
Lubricant/capacity	Yamalube Shaft Drive Gear Oil/800 mL 800 cc (0.9 US qt)

SPECIFICATIONS

BATTERIES

Items	Fairway Lounge
Battery:	BCI group 24, RC: minimum 75 min CCA: minimum 400A


CHASSIS

Items	Fairway Lounge
Suspension: Front Rear Lighting: Bulb voltage, wattage x quantity: Headlight Taillight	Independent (oil-over strut type) Pivoted trailing arm (mono-link) 12 V, 35 W x 2 12 V / 2.1 amp and .48 amp x 2
Steering system: Type Steering angle (L.H.) Steering angle (R.H.)	Rack and Pinion 1.85 turn 1.85 turn
Brakes: Brake system – front and rear Type of brake Brake pedal free play linkage adjustment (Brake cable end play)	Dual mechanical drum Cable-activated drum brake 20-25 mm (0.79-0.99 in.) 0.1-0.5 mm (0.004-0.02 in.)
Parking brake: Type	Foot type; parking brake with automatic release.
Release timing (With pedal segment in second notch) (Bolt heads round parallel to arm)	0.0 ~ 0.3 mm (0.000 ~ 0.001 in.)
Wheel: Tire size: Front Rear Rim size Tire pressure: Front Rear	18 x 8.50–8.00/4-ply turf type 18 x 8.50–8.00/6-ply turf type 7.00–I–8.00 140-160 kPa, 1.4-1.6 kgf/cm ² (20-23 psi) 197-217 kPa, 2.0-2.2 kgf/cm ² (29-31 psi)
Body color:	Tortuga

11



WIRING FAIRWAY LOUNGE WIRING DIAGRAM

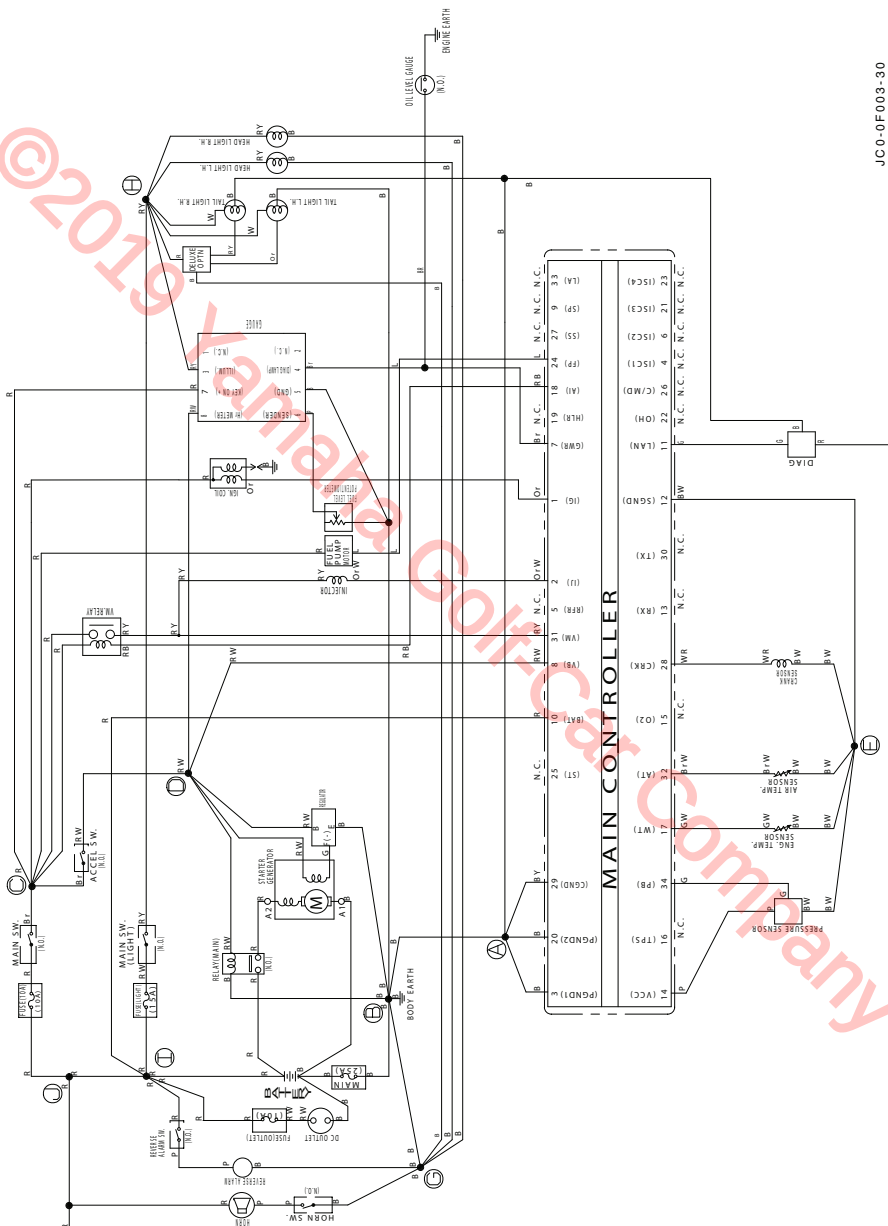

JCO-0F003-30

NOTES

©2019 Yamaha Golf-Car Company

NOTES

©2019 Yamaha Golf-Car Company