



YAMAHA

OWNER'S / OPERATOR'S MANUAL



READ THIS MANUAL CAREFULLY!
It contains important safety information.

DR2A17 EFI

ADVENTURER SPORT

2+2 VEHICLE

INTRODUCTION

Congratulations on your purchase of a Yamaha Electronic Fuel Injection (EFI) Adventurer Sport 2+2 Vehicle. This manual contains information you will need for proper operation, maintenance, and care of your EFI sport vehicle. A thorough understanding of these simple instructions will help you to obtain maximum enjoyment from your new Yamaha.

If you have any questions about the operation or maintenance of your vehicle, please consult a Yamaha dealer.

Yamaha Motor Corporation USA

**DR2A17 Adventurer Sport 2+2 Vehicle
Owner's/Operator's Manual
© 2018 by Yamaha Motor Corporation
USA
1st edition
All rights reserved. Any reprinting or
unauthorized use without the written
permission of
Yamaha Motor Corporation USA
is expressly prohibited.
Printed in U.S.A.
LIT-19626-95-19**



J2G-F8199-13

IMPORTANT MANUAL INFORMATION

Particularly important information is distinguished in this manual by the following notations:



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.

WARNING

A **WARNING** indicates a hazardous situation which, if not avoided, could result in death or serious injury.

NOTICE

A **NOTICE** indicates special precautions that must be taken to avoid damage to the four-passenger vehicle or other property.

TIP

A **TIP** provides key information to make procedures easier or clearer.

TIP

Yamaha continually seeks advancements in product design and quality; therefore, while this manual contains the most current product information available at the time of printing, there may be minor discrepancies between your vehicle and this manual. If you have any questions concerning this manual, please consult your Yamaha dealer.

WARNING

Read and understand this manual completely before operating your vehicle. This manual should be considered a permanent part of your vehicle and should remain with the vehicle when resold.

CONTENTS

WARRANTY

1

IMPORTANT LABELS

2

SAFETY INFORMATION

3

CONTROLS

4

PRE-OPERATION CHECKS

5

OPERATION

6

MAINTENANCE

7

STORAGE

8

SPECIFICATIONS

9

WIRING

10

WARRANTY

LIMITED 2-YEAR WARRANTY FOR TRANSPORTATION AND UTILITY VEHICLES

Yamaha Golf-Car Company hereby warrants that any new Yamaha utility vehicle or any multi passenger cars or specialty vehicles purchased from Yamaha, or an Authorized Dealer or Distributor in the United States will be free from defects in material and workmanship for TWO years from date of purchase, subject to the stated limitations. DURING THE PERIOD OF WARRANTY, any authorized Yamaha golf car service technician, dealer, or distributor will, free of charge, repair or replace, at Yamaha's option, any part adjudged defective by Yamaha due to faulty workmanship or material from the factory. Parts used in warranty repairs will be warranted for the balance of the vehicle's warranty period. All parts replaced under warranty become property of Yamaha Golf-Car Company.

Common Parts		Electric Car Specific	
Frame	2 Years	Battery - Trojan ' T875 ' without HydroLink Watering System	4 Years or 23,500 amp-hours whichever comes first *Detailed condition on the next page
Transaxle	2 Years	Electric Motor	2 Years
Pedals	2 Years	Motor Controller / Charger	2 Years
Brakes (excluding shoes / pads)	2 Years	Charger Cord	2 Years
Electrical wires, switches, and relays	2 Years	Charger Receptacle	2 Years
Suspension / Steering components	2 Years	Throttle Position Sensor	2 Years
Seats	2 Years	GAS Car specific	
Sun Top	2 Years	Exhaust / Intake / Generator	2 Years
Bumpers / Body Parts	2 Years	Gas Engine	2 Years
Floor Mats	2 Years	Throttle Cables / Controls	2 Years
Scorecard Holders	2 Years	Battery	1 Years
Bag Carrier	2 Years	Clutch (excluding drive belt)	2 Years
Common Accessories			
Windshield	3 Years		
Head Light	2 Years		
Tail Light	2 Years		
		All Remaining Parts	1 years

EXCLUSIONS from this Warranty shall include any failures caused by:

- Abnormal strain, neglect, or abuse, including lack of proper maintenance, and use contrary to the Owner's/Operator's Manual instructions.
- Accident or collision damage.
- Installation of parts or accessories that are not original equipment.
- Fading, rust, or deterioration due to exposure or ordinary wear and tear.
- Modifications or alterations that affect the car's condition, operation, performance, or durability, or which makes the car serve a purpose other than use as a two-person, golf course vehicle.
- Damage due to improper transportation.
- Acts of God, i.e. lightning, hail damage, flooding, fire, etc.

This Limited Warranty does not cover any parts replaced due to normal wear or routine maintenance, including oil and air filter elements, brake shoes, tire wear, spark plugs, starter and clutch drive belts. Any charges incurred in transporting a golf car or charger to and from an authorized Yamaha golf car dealer for service or in performing field service are also excluded from this warranty. Gasoline powered golf car starting batteries on vehicles equipped with a golf course GPS device, or any other device with a parasitic current draw, unless the vehicle is equipped from the factory with an optional deep cycle starting battery, are also excluded from this warranty.

THE CUSTOMER'S RESPONSIBILITY under this warranty shall be to operate and maintain the golf car and charger as specified in the appropriate Owner's/Operator's Manual, and give notice to an authorized Yamaha golf car dealer of any and all apparent defects within ten (10) days after discovery, and make the vehicle or charger available at that time for inspection and repairs by the dealer's authorized representative.

WARRANTY TRANSFER: This warranty is to the original owner only and is not transferable.

Yamaha Golf-Car Company makes no other warranty of any kind, expressed or implied. All implied warranties of merchantability and fitness of merchantability and fitness for a particular purpose which exceed the obligations and time limits stated in this warranty are hereby disclaimed by Yamaha Golf-Car Company and excluded from this Warranty. Some states do not allow limitations on how long implied warranty lasts, so the above limitation may not only apply to you. Also excluded from this Warranty is any incidental or consequential damages including loss of use. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion may not apply to you. This Warranty give you specific legal rights, and you may also have other rights, which vary, from state to state.

Yamaha Motor Corporation, USA, KENNESAW, GEORGIA 30144

EFFECTIVE DATE: 5/1/17

WARRANTY

CALIFORNIA EMISSION CONTROL WARRANTY STATEMENT YOUR WARRANTY RIGHTS AND OBLIGATIONS

1

The California Air Resources Board and Yamaha Golf-Car Company are pleased to explain the emissions control system warranty on your 2010 and later small off-road engine (SORE) vehicle. In California, new SORE vehicles must be designed, built and equipped to meet the State's stringent anti-smog standards. Yamaha Golf-Car Company must warrant the EECS on your SORE vehicle for the period of time listed below provided there has been no abuse, neglect or improper maintenance of your SORE vehicle.

Your EECS may include parts such as the carburetor, fuel-injection system, the ignition system, catalytic converter, fuel tanks, fuel lines, fuel caps, valves, canisters, filters, vapor hoses, clamps, connectors, and other associated emission-related components.

Where a warrantable condition exists, Yamaha Golf-Car Company will repair your SORE vehicle at no cost to you including diagnosis, parts and labor.

MANUFACTURER'S WARRANTY COVERAGE:

This emissions control system is warranted for two years. If any emission-related part on your equipment is defective, the part will be repaired or replaced by Yamaha Golf-Car Company.

OWNER'S WARRANTY RESPONSIBILITIES:

As the SORE vehicle owner, you are responsible for performance of the required maintenance listed in your owner's manual. Yamaha Golf-Car Company recommends that you retain all receipts covering maintenance on your SORE vehicle, but Yamaha Golf-Car Company cannot deny warranty solely for the lack of receipts.

As the SORE vehicle owner, you should however be aware that Yamaha Golf-Car Company may deny you warranty coverage if your SORE vehicle or a part has failed due to abuse, neglect, or improper maintenance or unapproved modifications.

You are responsible for presenting your SORE vehicle to Yamaha Golf-Car Company's distribution center or service center as soon as the problem exists. The warranty repairs should be completed in a reasonable amount of time, not to exceed 30 days. If you have a question regarding your warranty coverage, you should contact Yamaha Customer Relations at 800-962-7926.

GENERAL EMISSIONS WARRANTY COVERAGE:

Yamaha Golf-Car Company warrants to the ultimate purchaser and each subsequent purchaser that the SORE vehicle is:

Designed, built and equipped so as to conform with all applicable regulations; and

Free from defects in materials and workmanship that cause the failure of a warranted part to be identical in all material respects to that part as described in Yamaha Golf-Car Company's application for certification.

The warranty period begins on the date the SORE vehicle is delivered to an ultimate purchaser or first placed into service. The warranty period is two years. Subject to certain conditions and exclusions as stated below, the warranty on emission-related parts is as follows:

1. Any warranted part that is not scheduled for replacement as required maintenance in the written instructions supplied, is warranted for the warranty period stated above. If the part fails during the period of warranty coverage, the part will be repaired or replaced by Yamaha Golf-Car Company according to subsection (4) below. Any such part repaired or replaced under warranty will be warranted for the remainder of the period.
2. Any warranted part that is scheduled only for regular inspection in the written instructions supplied is warranted for the warranty period stated above. Any such part repaired or replaced under warranty will be warranted for the remaining warranty period.
3. Any warranted part that is scheduled for replacement as required maintenance in the written instructions supplied is warranted for the period of time before the first scheduled replacement date for that part. If the part fails before the first scheduled replacement, the part will be repaired or replaced by Yamaha Golf-Car Company according to subsection (4) below. Any such part repaired or replaced under warranty will be warranted for the remainder of the period prior to the first scheduled replacement point for the part.
4. Repair or replacement of any warranted part under the warranty provisions herein must be performed at a warranty station at no charge to the owner.
5. Notwithstanding the provisions herein, warranty services or repairs will be provided at all of our distribution centers that are franchised to service the subject engines or equipment.
6. The SORE vehicle owner will not be charged for diagnostic labor that is directly associated with diagnosis of a defective, emission-related warranted part, provided that such diagnostic work is performed at a warranty station.
7. Yamaha Golf-Car Company is liable for damages to other engine or equipment components proximately caused by a failure under warranty of any warranted part.

WARRANTY

1

8. Throughout the SORE vehicle warranty period stated above, Yamaha Golf-Car Company will maintain a supply of warranted parts sufficient to meet the expected demand for such parts.
9. Any replacement part may be used in the performance of any warranty maintenance or repairs and must be provided without charge to the owner. Such use will not reduce the warranty obligations of Yamaha Golf-Car Company.
10. Add-on or modified parts that are not exempted by the Air Resources Board may not be used. The use of any non-exempted add-on or modified parts by the ultimate purchaser will be grounds for disallowing a warranty claims. Yamaha Golf-Car Company will not be liable to warrant failures of warranted parts caused by the use of a nonexempted add-on or modified part.

WARRANTED PARTS:

The repair or replacement of any warranted part otherwise eligible for warranty coverage may be excluded from such warranty coverage if Yamaha Golf-Car Company demonstrates that the SORE vehicle has been abused, neglected, or improperly maintained, and that such abuse, neglect, or improper maintenance was the direct cause of the need for repair or replacement of the part. That notwithstanding, any adjustment of a component that has a factory installed, and properly operating, adjustment limiting device is still eligible for warranty coverage. The following emission warranty parts are covered:

NOTICE: Yamaha Golf-Car Company does not approve the use of high-pressure washers to clean the products they manufacture. Doing so may damage the finish on the body or result in doing other damage not covered by warranty.

1. Fuel Tank
2. Fuel Cap
3. Fuel Line
4. Fuel Line Fittings
5. Clamps
6. Control Valves
7. Control Solenoids
8. Electronic Controls
9. Control Cables
10. Control Linkages
11. Vapor Hoses
12. Carbon Cannister
13. Cannister Mounting Brackets


IMPORTANT LABELS

⚠ SAFETY AND INSTRUCTION LABELS


⚠ WARNING

Please read the following labels carefully before operating your sport vehicle, and promptly replace any labels which become damaged or removed. Death or serious personal injury can result from failing to read and comply with the safety instruction labels.

2

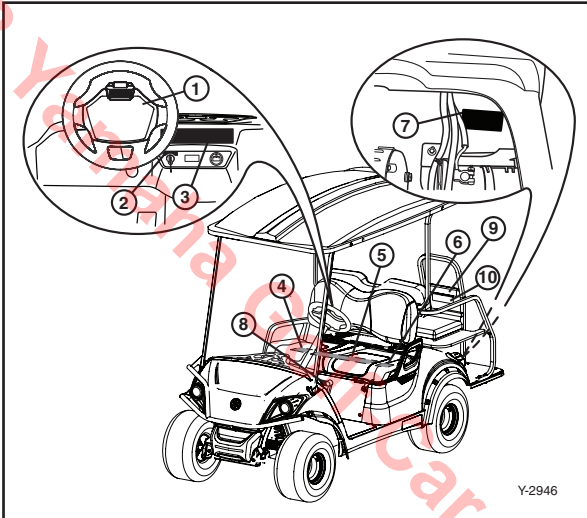

Y-2946

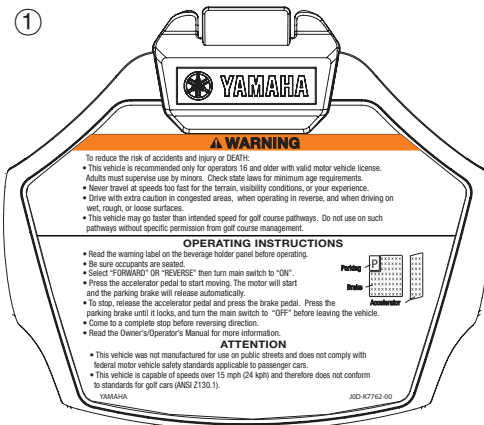

IMPORTANT LABELS

③

⚠ WARNING


To reduce the risk of accidents and injury or DEATH:

- Read the label located on the steering wheel before operation.
- Operate only when authorized and only in designated areas.
- This vehicle is restricted to 2 occupants per bench seat.
- Do not start vehicle until all occupants are seated.
- Remain fully seated and hold on when in motion.
- Keep entire body inside vehicle.
- Drive slowly in turns.

YAMAHA

OFF ⚡ ON ▼ ▲ ⚡ ON JCO-K7768-A0

⑤



⚠ WARNING

GASOLINE IS HIGHLY FLAMMABLE AND EXPLOSIVE. A fire or explosion could cause SEVERE INJURY or DEATH.

- Keep heat, sparks, and open flame away from fuel tank and fuel lines.
- Do not touch fuel tank while engine is running or hot.
- Do not modify fuel system.
- Services should be performed by dealer or qualified personnel.

YAMAHA

⚠ WARNING

OPERATION AT HIGHER SPEEDS THAN INDICATED ON THE SPEEDOMETER COULD RESULT IN SEVERE INJURY OR DEATH.

- Do not tamper with speedometer to increase speed.

⚠ AVERTISSEMENT

L'ESSENCE EST HAUTEMENT INFLAMMABLE ET EXPLOSIVE. Un incendie ou une explosion peuvent provoquer de GRAVES BLESSURES OU LA MORT.

- Éviter toute source de chaleur, d'étincelles et de flammes nues du réservoir et des conduites de carburant.
- Ne pas ajouter de carburant pendant que le moteur tourne ou qu'il est chaud.
- Ne pas modifier le circuit d'alimentation.
- Les services doivent être effectués par un concessionnaire ou par du personnel qualifié.

JMI-40297-01

N432



④

This spark ignition system meets all requirements of the Canadian Interference Causing Equipment Regulations.
Ce système d'allumage par étincelle de véhicule respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.

YAMAHA

JMI-40297-02

Y-1606

⑥

YEAR OF CONSTRUCTION: 2017 MY2018
YAMAHA MOTOR POWERED PRODUCTS CO., LTD
200-1 SAKAGAWA, KAKEGAWA, JAPAN
MODEL: DR2A18 CAMP
BATTERY WEIGHT: MAX. 19 kg
NOMINAL SYSTEM VOLTAGE: 12V
VEHICLE LOAD CAPACITY: 181 kg PER SEAT




MAX. POWER: 8.9 hp (6.7 kW)
CURB WEIGHT: 440.5 kg (971 lb)
G.V.W.: 802.5 kg (1769 lb)

This vehicle complies to SAE-J-2258 2010

J2G-F4236-10

IMPORTANT LABELS

2

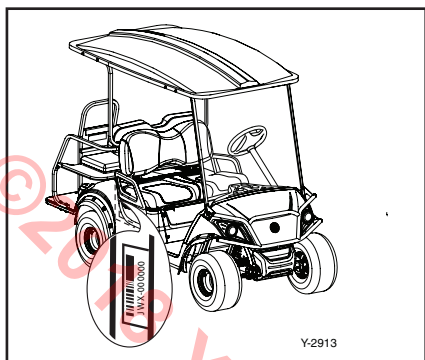

SERIAL NUMBER


The sport vehicle serial number is identified in the location shown.

TIP

The first three digits of the serial number are for model identification; the remaining digits are the unit production number. Keep a record of these numbers for reference when ordering parts from a Yamaha Golf-Car Company dealer.

The engine serial number ① is affixed in the location shown.

1

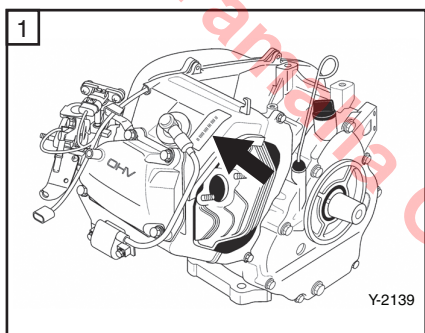


② Engine Information

IMPORTANT ENGINE INFORMATION				YAMAHA
ENGINE FAMILY : *****				
REFER TO OWNER'S MANUAL FOR MAINTENANCE SPECIFICATIONS AND ADJUSTMENTS.				
DISPLACEMENT:	*** cm ³	VALVE LASH(in)	IN ***.***	EX: ***.***
IGNITION TIMING & IDLE MIXTURE		NO OTHER ADJUSTMENTS NEEDED.		
IDLE SPEED:	**** rpm	AT NO LOAD		
FUEL THIS ENGINE IS CERTIFIED TO OPERATE ON UNLEADED GASOLINE				
ENGINE OIL:	SAE 10W-30	TYPE	SD	
THIS ENGINE MEETS ***** CALIFORNIA EMISSION REGULATIONS FOR OFF-ROAD ENGINES. THIS ENGINE CONFORMS TO ***** U.S. EPA REGULATIONS FOR SMALL NONROAD ENGINES.				
YAMAHA MOTOR CO., LTD.				

Y-851a

2

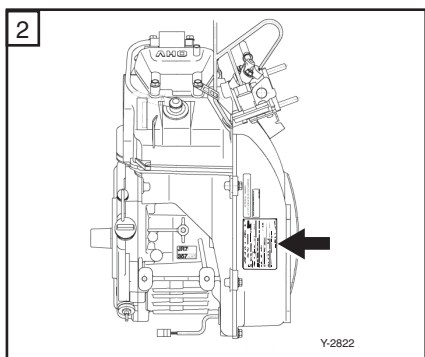



SAFETY INFORMATION

Yamaha sport vehicles are designed to be simple to operate. However, be sure to observe the following to reduce the risk of serious injury or death due to loss of control and other hazards:

BEFORE OPERATING THE SPORT VEHICLE

3

- Read this Owner's/Operator's manual and all safety and instruction labels on the sport vehicle before operating.
- Perform the pre-operation checks found in Section 5 of this manual.
- This vehicle is recommended only for operators 16 and older with a valid motor vehicle license. Adults must supervise use by minors. Check state laws for minimum age requirements.
- Do not allow more than two occupants per seat. This sport vehicle is restricted to four occupants.
- Never give a ride to a passenger who is unable to put both feet firmly on the floorboard while seated with his or her back against the backrest.
- Never carry passengers on the cargo bed.
- Do not operate the sport vehicle while under the influence of alcohol or drugs; their effect on vision and judgment make operating a sport vehicle dangerous.
- This vehicle was not manufactured for use on public streets and does not comply with federal motor vehicle safety standards applicable to passenger cars.




Y-68




SAFETY INFORMATION

3

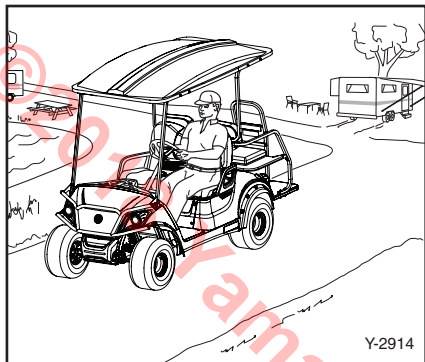


- Do not operate the sport vehicle on public streets, roads or highways unless allowed by law or the local regulating authority.
- This vehicle may go faster than the intended speed for campground pathways. Do not use on such pathways without specific permission from campground management.
- Do not make any modification or addition which affects capacity or safe operation, or make any changes not in accordance with the Owner's/Operator's manual.

WHILE OPERATING THE SPORT VEHICLE

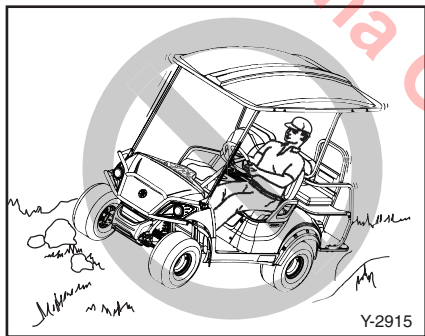

- Keep your entire body inside the sport vehicle, remain seated and hold on when the vehicle is in motion.
- Do not start the sport vehicle until all occupants are seated.
- Always keep both hands on the steering wheel when driving. Always go at a speed that is proper for the terrain, visibility, and operating conditions, and your experience. Go slowly and be extra careful when operating on unfamiliar terrain. Always be alert to changing terrain conditions when driving the vehicle.
- Never operate on excessively rough, slippery, or loose terrain.
- Use extra care in congested areas or when backing up. Always back up slowly, and watch carefully. Avoid starting or stopping abruptly.
- Avoid turning the steering wheel too sharply at higher speeds to avoid tipping or rolling the vehicle.
- Never attempt jumps or other stunts.

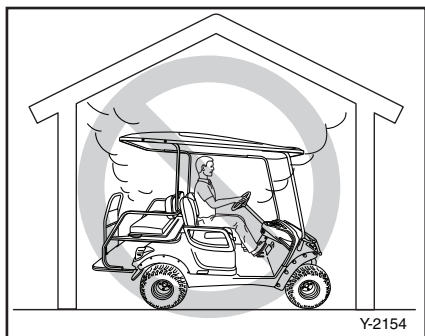



SAFETY INFORMATION

- Always drive slowly straight up or straight down slopes – never at an angle to avoid tipping or rolling the vehicle. Never operate the vehicle on slopes that are too steep for it or for your abilities.
- Never operate on slopes that are slippery or ones where you will not be able to see far enough ahead of you. Never go over the top of a slope at speed if you cannot see what is on the other side.
- Always check terrain carefully before going down slopes. Go as slowly as possible. Never go down a slope at high speed.
- Always check for obstacles before operating in a new area.
- Never operate the vehicle in fast flowing water or water deeper than 15 cm (6 in). Remember that wet brakes may have reduced stopping ability. Test your brakes after leaving water. If necessary, apply them several times to let friction dry out the linings.
- Do not run the engine indoors. Exhaust gas is poisonous and could result in carbon monoxide poisoning.

CARRYING PASSENGERS

- This vehicle is designed to carry the driver and up to three passengers. When a seat is flipped down, do not carry passengers in the cargo area.
- Do not allow more than 2 people in each bench seat.
- Maximum load per seat: 181 kg (400 lb)
- Passengers must remain fully seated and hold on to the handrails when in motion.
- Do not allow children to ride unsupervised in the rear bench seat.



SAFETY INFORMATION

ACCESSORIES AND LOADING

Accessories

Accessories can affect the handling and control of your vehicle. Keep the following in mind when considering an accessory or operating a sport vehicle which has accessories.

- Choose only accessories designed for your sport vehicle. Your Yamaha dealer has a variety of genuine Yamaha accessories. Other accessories may also be available on the market. However, it is not possible for Yamaha to test all non-Yamaha accessories, nor have any control over the quality or suitability of them. Choose a genuine Yamaha accessory, or one that is equivalent in design and quality.
- Accessories should be rigidly and securely mounted. An accessory which can shift position or come off while you are operating could affect your ability to control the sport vehicle.
- Do not mount an accessory where it could interfere with your ability to control the sport vehicle. Examples include (but are not limited to) an object that limits your ability to turn the steering wheel or one that limits your view.
- Use extra caution when driving a sport vehicle with accessories. The sport vehicle may handle differently than it does without accessories.




SAFETY INFORMATION

Loading


Cargo can change the stability and handling of a sport vehicle. You must use common sense and good judgment when carrying cargo. Keep the following points in mind:

- Never exceed the weight limits shown on page 9-1. An overloaded sport vehicle can be unstable.
- Capacity for cargo area (including footrest and bagwell: 110 kg (250 lb))
- Cargo should be as far forward on the cargo area as possible, and distributed evenly from side to side. Be sure cargo is secured so that it cannot move around during operation.
- Make sure the load does not interfere with controls or your ability to see where you are going.
- Drive more slowly than you would without a load. The more weight you carry, the slower you should go. Although conditions vary, it is good practice not to exceed low range whenever you are carrying heavier loads or when towing a trailer.
- Allow more braking distance. A heavier vehicle takes longer to stop. Do not brake abruptly when carrying loads on the cargo bed.
- Avoid making sharp turns unless at very slow speeds to avoid tipping or rolling the vehicle.
- Avoid hills and rough terrain. Choose terrain carefully. Added weight affects the stability and handling of the sport vehicle.


CONTROLS

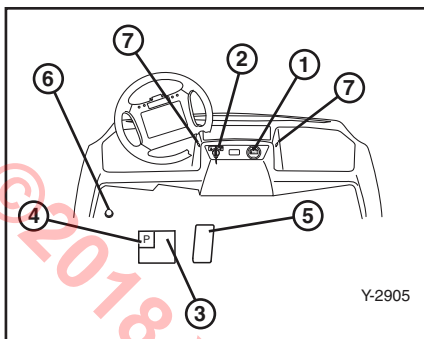

Y-2905

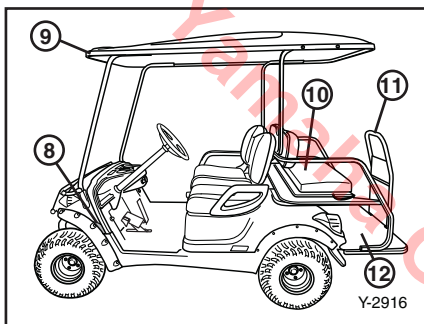


Y-2916

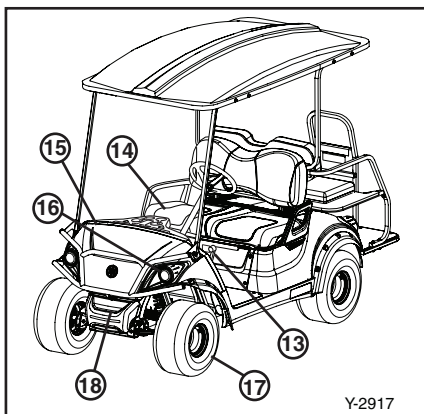


Y-2917

FEATURES

- | | |
|--|-----------------------|
| ① Engine/oil warning light/fuel gauge/hour meter | ⑭ Front seat |
| ② Main/Light switch | ⑮ Front body |
| ③ Brake pedal | ⑯ Headlights |
| ④ Parking brake pedal | ⑰ Front tire |
| ⑤ Accelerator pedal | ⑱ Front bumper |
| ⑥ Horn switch | ⑲ Battery |
| ⑦ USB ports | ⑳ Rear body |
| ⑧ Reflector | ㉑ Rear tire |
| ⑨ Sun roof | ㉒ Rear bumper |
| ⑩ Rear seat | ㉓ Taillights |
| ⑪ Rear handrail | ㉔ Side handrail |
| ⑫ Rear footrest | ㉕ Fuel tank |
| ⑬ Drive select lever | ㉖ Fuel cap |
| | ㉗ E.F.I. fuel pump |
| | ㉘ Fuel tank vent |
| | ㉙ Cover filler funnel |

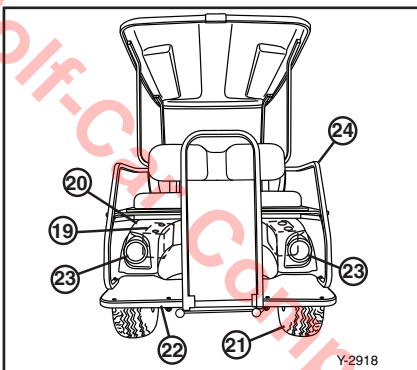


Y-2918

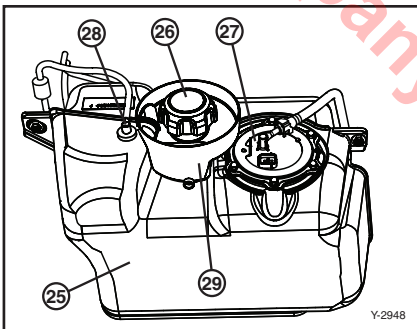

Y-2948

CONTROLS

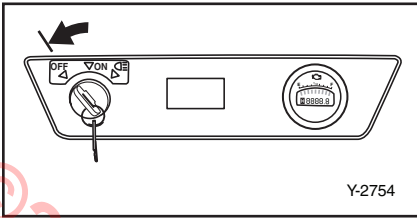


MAIN SWITCH

The main switch controls the following items:


“OFF”

The electrical power circuit is switched off. The key can be removed only in this position.

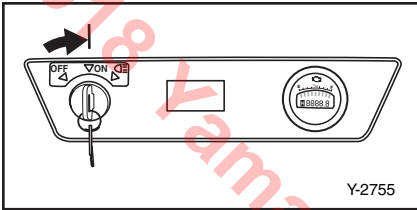


“ON”

The electrical power circuit is switched on. The sport vehicle can be driven.

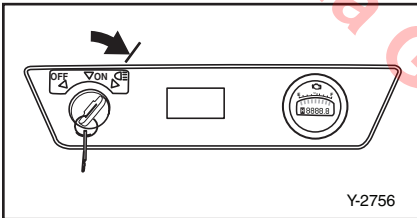

“ON” WITH LIGHTS

The functions for this position are the same as for the ON position; however, this position will activate the headlights and taillights.

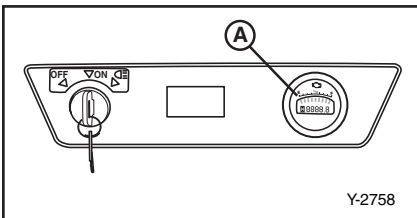


FUEL GAUGE

The fuel gauge displays the fuel level in the fuel tank. The fuel gauge will only work when the key is in the ON position.

(A) Fuel gauge

CONTROLS

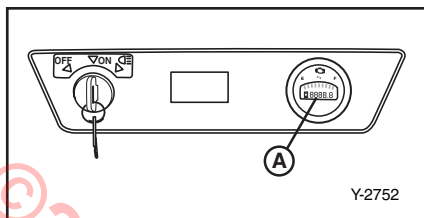

HOUR METER


The hour meter displays the total number of hours the sport vehicle has been run. Use the hour meter to determine when scheduled maintenance is due.

- Ⓐ Hour meter

USB PORTS

A USB port is located inside the dash on the driver side and passenger side. These can be used to power or charge USB devices or accessories. The USB is only powered when the key is in the ON position.

- ① USB port

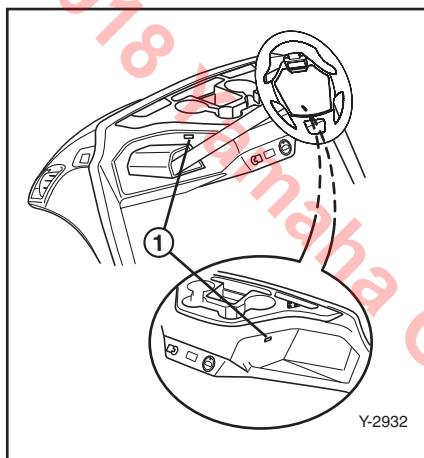

ENGINE/OIL WARNING LIGHT


When the engine oil level falls below an acceptable level, this light comes on.

NOTICE

If the light comes on, stop the engine, check the engine oil level and add oil as necessary. (See page 5-3.)

When the engine/oil warning light is flashing while the key is on, there may be a problem with the fuel injection system. This may affect performance, emissions and fuel economy or cause damage to the fuel injection system or engine.


CONTROLS

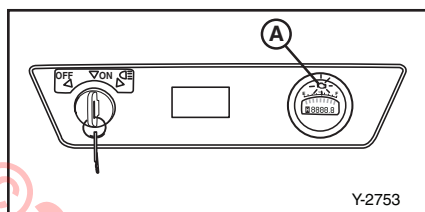

NOTICE

If the light is flashing, do not operate the vehicle. Contact your Yamaha Service representative to have the vehicle serviced.


- Ⓐ Engine/oil warning light

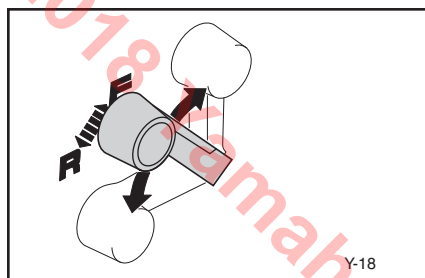

DRIVE SELECT LEVER


The drive select lever is used to shift the sport vehicle into forward or reverse. After coming to a complete stop, move the lever to the desired position.

Lever Position	Car Movement
F	FORWARD
R	REVERSE

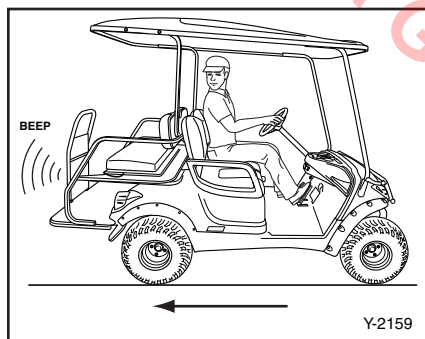

TIP

The reverse alarm will sound when the drive select lever is turned to "R."

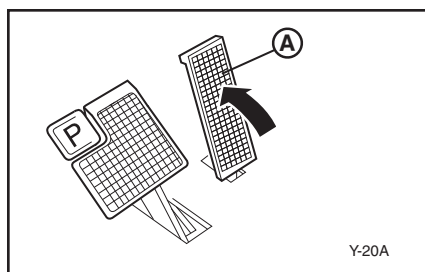


ACCELERATOR PEDAL

The accelerator pedal controls the sport vehicle's speed.

Action	Car Speed
Depress pedal	Increase
Release pedal	Decrease

- Ⓐ Accelerator pedal


CONTROLS

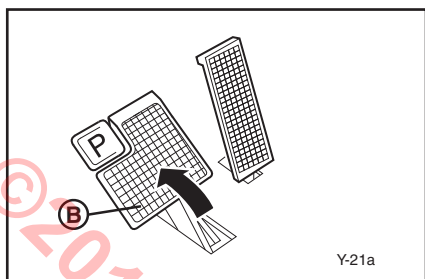

BRAKE PEDAL

Press down on the brake pedal to stop the sport vehicle.

Ⓑ Brake pedal

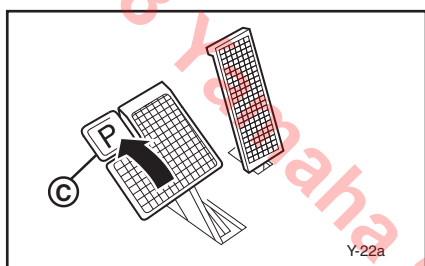

PARKING BRAKE PEDAL

Press down on the parking brake pedal whenever parking the sport vehicle.


Ⓒ Parking brake pedal

TIP

Release the parking brake by depressing the accelerator pedal.


⚠ WARNING

The parking brake will automatically release when the accelerator pedal is depressed. If the main switch is in the "ON" position, depressing the accelerator may suddenly cause the sport vehicle to move. Death or serious personal injury can result from failing to comply with the safety instructions in this manual.

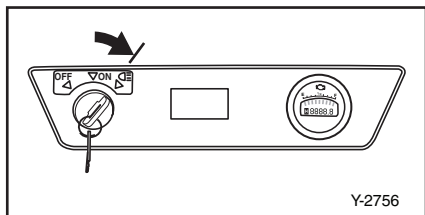

HEADLIGHT/TAILLIGHT ON POSITION

Turn the main switch all the way to the right to the second ON position. This will activate the headlights and taillights.

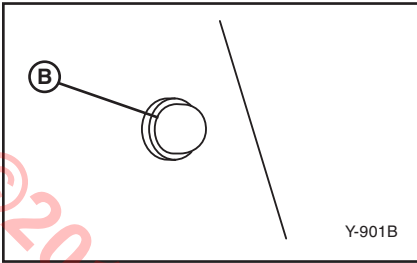


HORN SWITCH

The horn is located adjacent to the brake pedal, and is activated by depressing with your foot.

Ⓑ Horn switch

TIP

It is advisable to sound the horn when approaching blind corners.

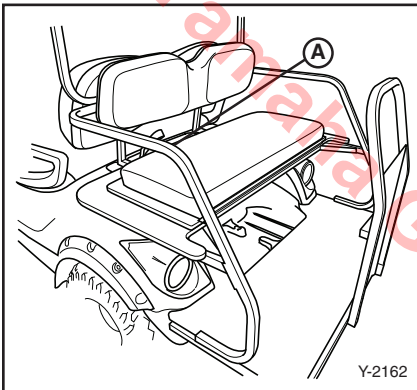


REAR SEAT

The rear seat is designed to carry a maximum of two passengers. All passengers should remain inside the sport vehicle, remain seated with their feet on the rear footrest and hold onto the handrails while the vehicle is in motion.

The rear seat can be folded down to a cargo bed. Grab the strap and lift up the seat and fold it to the rear of the vehicle.

Ⓐ Strap

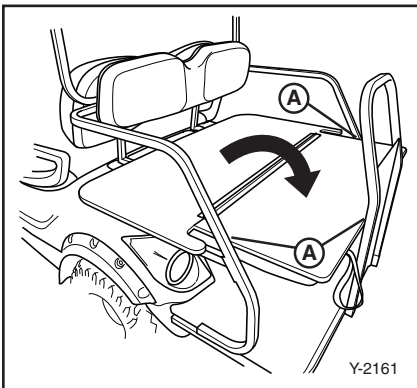

⚠ WARNING

There are several pinch points for the rear seat when folding it down. Use care when folding the seat down so nothing is in the area of these pinch points.

Ⓐ Pinch points

CONTROLS

WARNING

Never allow passengers to ride on the cargo bed when it is folded down. There is no seating and passengers can easily fall off. Death or serious personal injury can result in failure to comply.

Always make sure your cargo is secure when using the cargo bed. Tie the load down with cords or straps where needed.

PRE-OPERATION CHECKS

Pre-operation checks should be made each time you use your sport vehicle. Get in the habit of performing the following checks in the same way so that they become second nature.

⚠ WARNING

To keep vehicle from moving while performing pre-operation checks:

- Remove main switch key.
- Apply parking brake.

Death or serious personal injury can result from failing to comply with the safety instructions in this manual.


5

PRE-OPERATION CHECKS


Refer to the Periodic Maintenance charts on pages 7-1 and 7-2.

SEAT

Open the seat for checking and servicing.

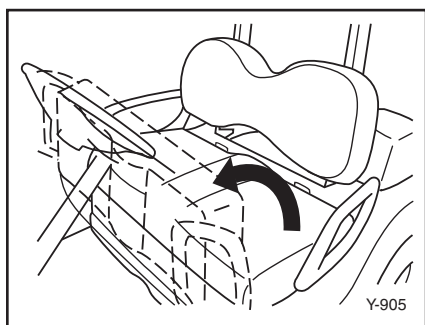

PRE-OPERATION CHECKS

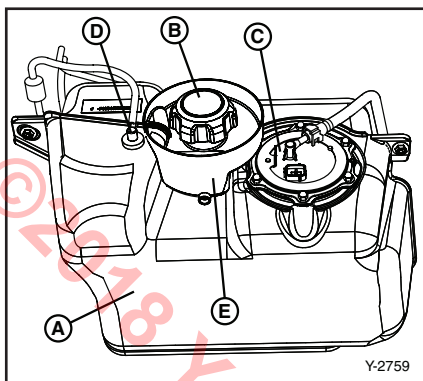

FUEL SYSTEM

Make sure there is sufficient fuel in the tank. Also check fuel line and connections for leakage.

- (A) Fuel tank
- (B) Fuel cap
- (C) E.F.I fuel pump
- (D) Fuel tank vent
- (E) Cover filler funnel

WARNING

Gasoline and its vapors are highly flammable and explosive. To avoid fires and explosions and to reduce the risk of injury when refueling, follow these instructions.

1. Stop engine and allow it to cool for several minutes before refueling.
Do not smoke when refueling and keep away from sparks, flames or other sources of ignition.
Refuel in a well-ventilated area.
2. Take care not to spill gasoline.
If gasoline spills, wipe it up immediately with dry rags. Always dispose of gasoline-soaked rags properly.
3. Tighten until a clicking sound is heard.

WARNING

Gasoline is poisonous and can cause injury or death. If you swallow gasoline, inhale a lot of gasoline vapor or get gasoline in your eyes, get immediate medical attention.


If any gasoline gets on your skin, immediately wash with soap and water. Change clothing if gasoline spills on it.

Recommended fuel:
Unleaded gasoline

Fuel tank capacity:
22.0 L (5.8 US gal)

Gasoline-based fuels containing more than 10% ethanol are not recommended.

PRE-OPERATION CHECKS

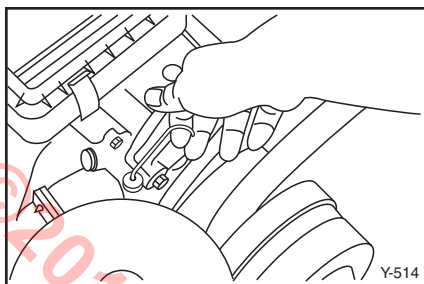


NOTICE

Avoid using gasoline blended with methyl alcohol which can damage fuel system parts.

ENGINE OIL

With the golf car parked on level ground, remove the dipstick and make sure the engine oil is between the MIN and MAX marks (the crosshatched area on the end of the dipstick).

- Ⓐ Oil level dipstick
- Ⓑ Maximum oil level
- Ⓒ Safe operating range

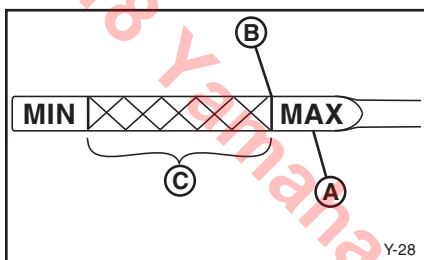


If the oil level is **below** the MIN mark on the dipstick, add oil through the oil filler hole until the oil level is between the MIN and MAX marks.

- Ⓓ Oil filler hole

NOTICE

- Use care not to fill past the MAX dipstick mark, and be sure no foreign material enters the crankcase.
- Use care not to get oil on the starter belt.

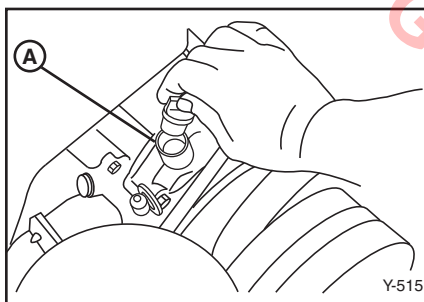

Recommended oil:
YAMALUBE SAE 10W-30
4-cycle oil

Engine oil capacity:
1.0 L, 1000 cc
(1.0 US qt)

Oil change quantity:
1.0 L, 1000 cc
(1.0 US qt)


TIP

The distance between the dipstick marks represents approximately 1/2 L (1/2 US qt) of oil.

TIP

Recommended engine oil classification: API Service SE, SF, or SG. Engine oils labeled "Energy Conserving II" are recommended.

PRE-OPERATION CHECKS

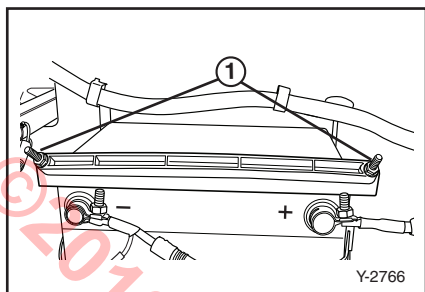


BATTERY

Check that the battery is held securely in place to prevent the battery from being damaged from vibration or jarring. Tighten the battery hold-down nuts if loose. Also check that the battery cap is not missing to prevent the battery acid from spilling from the battery. Check the battery terminals for corrosion.

① Battery hold-down nuts

⚠ WARNING

Battery electrolyte is poisonous and dangerous, causing severe burns, etc. It contains sulfuric acid. Avoid contact with skin, eyes or clothing. Ventilate when charging or using in enclosed space. Always shield eyes when working near batteries. KEEP OUT OF REACH OF CHILDREN.

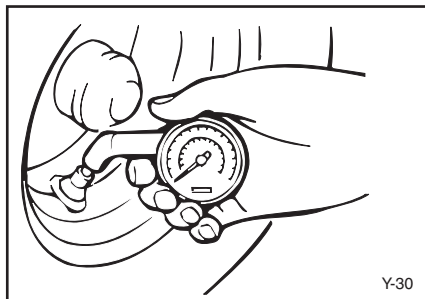

TIRE CONDITION


Tire Air Pressure

Check the tire air pressure before operating the sport vehicle.

Tire pressure:

Front: 152 kPa (22 psi)

Rear: 152 kPa (22 psi)

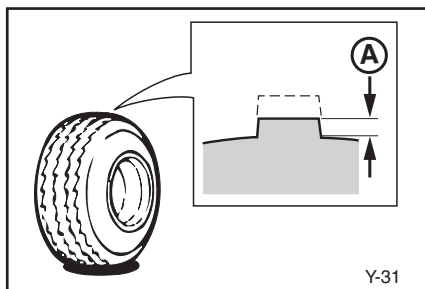


Tire Wear Limit

Check the tire surface for damage, cracks or embedded objects. When tire tread wears down to 3 mm (0.12 in.), replace the tire.

Ⓐ Wear limit

PRE-OPERATION CHECKS

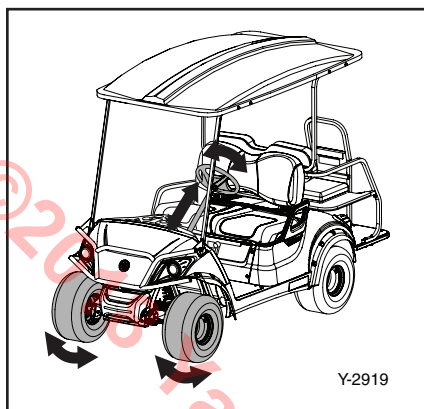


STEERING SYSTEM

Check the steering system for excessive freeplay by:

- moving the steering wheel up and down, and back and forth.
- turning the steering wheel slightly to the right and left.

If you feel excessive freeplay, or hear rattling sounds which may indicate loose steering components, consult a Yamaha dealer.

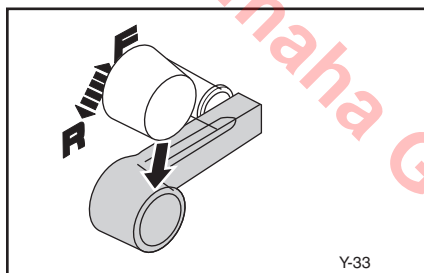


REVERSE ALARM

Check the reverse alarm by moving the drive select lever to "R" for reverse. The alarm should sound.

PEDAL OPERATION

Check the following pedal controls for proper operation. If a pedal does not work properly, consult a Yamaha dealer.

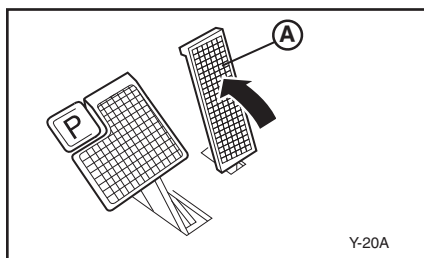


Accelerator Pedal

⚠ WARNING

With the main switch in the "OFF" position, make sure the accelerator pedal operates smoothly.

Ⓐ Accelerator pedal

PRE-OPERATION CHECKS

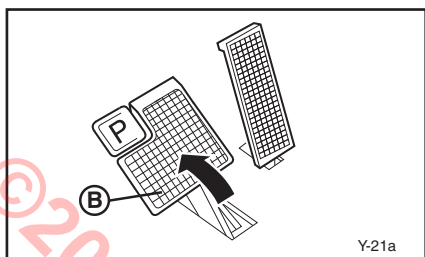

Brake Pedal


Make sure the brake pedal feels firm when pressed and returns to its original position when released.

Ⓑ Brake pedal

WARNING

Consult your Yamaha dealer before using your sport vehicle if you suspect brake problems.

5

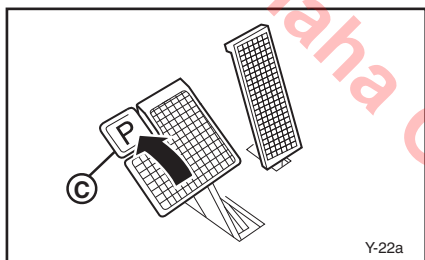

Parking Brake Pedal

Make sure the parking brake pedal locks in place with a positive click, and releases when the accelerator pedal is pressed.

Ⓒ Parking brake pedal

TIP


Release the parking brake by depressing the accelerator pedal.

Headlights/Taillights


Ensure the headlights and taillights are operational.

WARNING

Never operate the sport vehicle at night or during inclement weather without properly working headlights/taillights. Death or serious personal injury can result from failing to comply with the safety instructions in this manual.

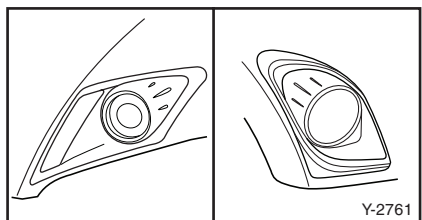

PRE-OPERATION CHECKS

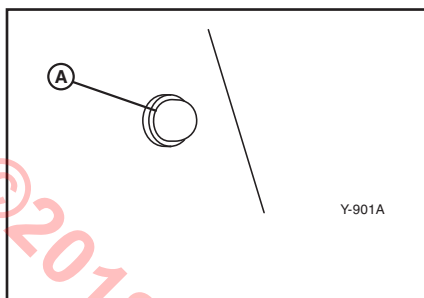

Horn Switch


Make sure the horn operates correctly.

Ⓐ Horn switch

BODY AND CHASSIS

Before each use, visually inspect the sport vehicle body and chassis for damaged and/or missing parts.

OPERATION

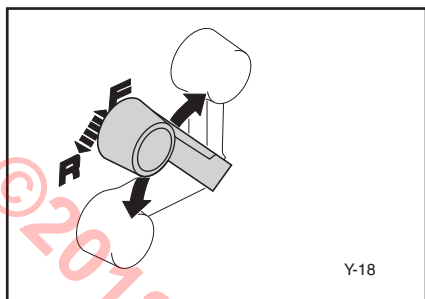

STARTING

1. With the parking brake applied, turn the drive select lever to “F” for forward, or “R” for reverse.


NOTICE

Do not shift from “F” (forward) to “R” (reverse) while the sport vehicle is moving. Transmission damage can result.

2. Turn the main switch to “ON.”


! WARNING

Do not depress the accelerator pedal when turning on the main switch or the sport vehicle may suddenly start moving. Death or serious personal injury can result from failing to comply with the safety instructions in this manual.

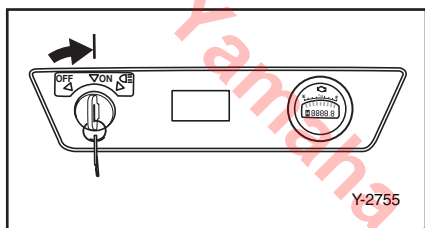


3. Check that your path is clear in the direction you plan to go, and slowly depress the accelerator pedal. The sport vehicle will start to move.

Ⓐ Accelerator pedal

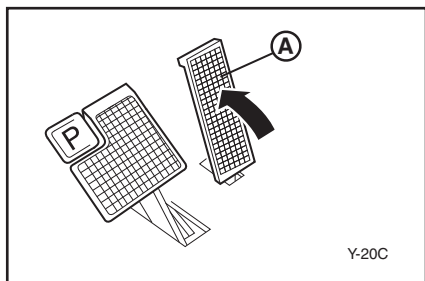

TIP

The parking brake automatically releases when the accelerator pedal is depressed.

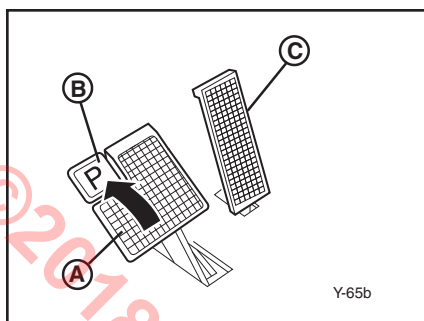

STOPPING

To stop the sport vehicle, gradually press down on the brake pedal.

Ⓐ Brake pedal

When the sport vehicle has come to a stop, apply the parking brake pedal and turn the main switch to "OFF."

Ⓑ Parking brake pedal

NOTICE

Do not hold the sport vehicle on an incline with the accelerator – use the brake. Transmission damage can result.

6

MAXIMUM LOADING LIMIT

- Vehicle Rated Capacity (passengers/cargo/trailer/access) 340 kg (749.6 lb)
- G.V.W. (curb & vehicle rate capacity) 802.5 kg (1,769.2 lb)

LOADING

Cargo can change the stability and handling of a vehicle.

You must use common sense and good judgment when carrying cargo. Keep the following points in mind:

- Never exceed the weight limits shown. An overloaded vehicle can be unstable.
- Load cargo on the cargo bed as close to the center of the vehicle as possible to avoid tipping the vehicle.

OPERATION

6

- Cargo should be as far forward on the bed as possible, and distributed evenly from side to side. Be sure cargo is secured so that it cannot move around during operation.
- Make sure the load does not interfere with controls or your ability to see where you are going.
- Drive more slowly than you would without a load. The more weight you carry, the slower you should go.
- Allow more braking distance. A heavier vehicle takes longer to stop.
- Avoid making sharp turns unless at very slow speeds to avoid tipping or rolling the vehicle.
- Avoid hills and rough terrain. Choose terrain carefully. Added weight affects the stability and handling of the vehicle.

WARNING

Uncontrolled Movement Hazard

- Never exceed the stated load capacity for this vehicle.
- Distribute the load evenly.
- Secure cargo in cargo bed.
- Reduce speed and allow greater distances for braking.

WARNING

Fall and Thrown Object Hazard

- Do not carry passengers in the cargo bed.

WARNING

Fire or Explosion Hazard

- Do not fill fuel containers on the cargo bed.
- Set fuel container on the ground.
- Keep fuel nozzle in contact with can inlet while filling.
- Tighten cap before setting fuel container on cargo bed.

MAINTENANCE

PERIODIC MAINTENANCE CHARTS

Regular maintenance is required for the best performance and safe operation of your sport vehicle.

⚠ WARNING

Be sure to turn off the main switch and apply the parking brake when you perform maintenance, unless otherwise specified. If the owner is not familiar with servicing the machine, death or serious personal injury can result. When in doubt the work should be done by a Yamaha dealer or other qualified mechanic.

NOTICE

Yamaha Golf-Car Company does not approve the use of high-pressure washers to clean the products they manufacture. Doing so may damage the finish on the body or result in doing other damage not covered by warranty.

CS - CHECK CA - CHECK AND ADJUST R - REPLACE S - SERVICE CL - CLEAN AND LUBRICATE L - LUBRICATE

	Remarks	Daily Pre- Opera- tion	40 Rounds 20 hours 100 miles 160 kms (Every month)	250 rds 125 hrs 600 mls 1000 kms (Every 6 months)	500 rds 250 hrs 1200 mls 2000 kms (Every year)	1000 rds 500 hrs 2500 mls 4000 kms (Every 2 years)	2000 rds 1000 hrs 5000 mls 8000 kms (Every 4 years)	Page
PRE-OP	Check engine oil	CS	CS	CS				5-3
	Check fuel lines for leakage	CS	CS	CS	CS	CS	CS	5-2
	Check fuel level	CS	CS	CS	CS	CS	CS	5-2
	Check for looseness and corrosion of battery terminals and hold downs	CS	CS	CS	CS	CS	CS	5-4
	Check brake pedal free play and adjust if necessary	CS	CA	CA	CA	CA	CA	7-14
	Check steering operation	CS	CS	CS	CS	CS		5-5
	Check tire pressure, tread depth, tire surface for damage	CS	CA	CA	CA	CA	CA	5-4
	Check body and chassis for damage	CS	CS	CS	CS	CS	CS	5-7
	Check tightness of all bolts, nuts, screws and rivets	CS	CS	CS	CS	CS	CS	*
	Check reverse alarm operation	CS	CS	CS	CS	CS	CS	5-5
EVERY MONTH	Check for debris in intake air duct, tubing and connection		CS					
	Check wear of drive belt		CS	CS	CS	CS	CS	7-8/ 7-9
	Check operation of Forward / Reverse shifting		CS	CS	CS	CS	CS	6-1
	Clean / Lube pedal control area		CL					*
EVERY 6 MONTHS	Wash pre-filter, check air cleaner element			S	S	S	S	7-7/ 7-8
	Check spark plug and plug cap condition** / Check compression			CS	CS	CS	CS	7-4
	Check shock absorbers for oil leaks and damaged springs			CS	CS	CS		*

* Items without a page number reference should be serviced by a Yamaha dealer or other qualified mechanic. This manual does not contain these procedures. They are contained in the Service Manual.

** Related to emission control system.

MAINTENANCE

CS - CHECK CA - CHECK AND ADJUST R - REPLACE S - SERVICE CL - CLEAN AND LUBRICATE L - LUBRICATE

	Remarks	Daily Pre- Operation	40 Rounds 20 hours 100 miles 160 kms (Every month)	250 rds 125 hrs 600 mls 1000 kms (Every 6 months)	500 rds 250 hrs 1200 mls 2000 kms (Every year)	1000 rds 500 hrs 2500 mls 4000 kms (Every 2 years)	2000 rds 1000 hrs 5000 mls 8000 kms (Every 4 years)	Page
EVERY YEAR	Replace engine oil				R	R	R	7-5
	Grease primary and secondary clutch				L			*
	Adjust throttle cables,** check electronic fuel injection throttle shaft for wear**				CA	CA	CA	*
	Check starter V-belt for damage and tension				CS	CS	CS	*
	Check drive belt for slippage, wear or scratches				CS	CS	CS	7-9
	Check operation of speed limiter				CS	CS	CS	*
	Apply battery terminal protectant				S	S	S	*
	Check wiring connections and insulation				CS	CS	CS	*
	Check rear axle bearing play for roughness or freeplay				CS	CS	CS	*
	Perform primary and secondary clutch maintenance: (primary) - Inspect sheaves for wear and damage - Inspect weights/washer and sliders for wear (secondary) - Inspect ramp shoes for wear - Replace if necessary				CL	CL	CL	*
	Check steering knuckle bushing free play / Adjust wheel alignment				CA	CA	CA	*
	Check wheel nut tightness, front wheel bearing play				CS	CS	CS	*
	Check operation and adjust pedal stop if necessary				CA	CA	CA	*
	Adjust parking brake release				CA	CA	CA	7-15
EVERY 2 YEARS	Check starter brushes for wear and commutator for dirt					CS	S	*
EVERY 4 YEARS	Replace transmission oil						R	*
	Replace fuel hoses						R	*
	Check tightness of cylinder head / Adjust valves						CA	*
	Inspect brake shoes and adjust or replace if necessary						CS R	*

* Items without a page number reference should be serviced by a Yamaha dealer or other qualified mechanic. This manual does not contain these procedures. They are contained in the Service Manual.

** Related to emission control system.

MAINTENANCE

EXHAUST EMISSION CONTROL SYSTEM AND COMPONENTS

Body	Abbreviation
• ELECTRONIC FUEL INJECTION	EFI
• ELECTRONIC CONTROL UNIT & PLUG, SPARK	ECU
• CRANKCASE 1 & HEAD, CYLINDER 1	PCV (Positive Crankcase Ventilation)
• AIR FILTER ASSY.	ACL (Air Cleaner)
• MUFFLER	MUFF., 2
• CARBON CANISTER	CC
• INVERSION VALVE	IV

The above items and the corresponding abbreviations are provided in accordance with U.S. EPA REGULATIONS FOR SMALL NONROAD ENGINES and the CALIFORNIA REGULATIONS FOR NEW 1995 AND LATER OFFHIGHWAY RECREATIONAL VEHICLES AND ENGINES.

The abbreviations conform to the latest version of the SAE's recommended practice document J1930, "Diagnostic Acronyms, Terms, and Definitions For Electrical/Electronic System."


It is recommended that these items be serviced by a Yamaha dealer or other qualified mechanic.

TROUBLESHOOTING

If the vehicle's engine will not start, use the following chart:

Cause	Remedy
Fuel System	
No fuel in tank	Fill fuel tank
Fuel pump inoperable	Consult Yamaha dealer
Clogged fuel line	Consult Yamaha dealer
Foreign matter in fuel filter	Consult Yamaha dealer
Dirty injector	Consult Yamaha dealer
Electrical System	
Spark plug dirty with carbon, or wet	Clean carbon or wipe spark plug dry
Faulty ignition system	Consult Yamaha dealer

MAINTENANCE

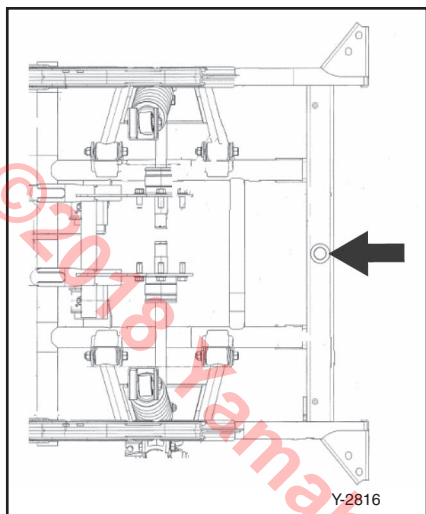

Rear Lifting Point


If the rear of the car needs to be lifted for a maintenance procedure, make sure it is lifted at the correct rear lifting point (see arrow).

Spark Plug Inspection

You should periodically remove and inspect the spark plug. Dirty or worn spark plugs can cause poor performance.

WARNING

When removing or installing the spark plug, be careful not to damage the insulator. A damaged insulator could allow external sparks, which could lead to explosion or fire. Death or serious personal injury can result from failing to comply with the safety instructions in this manual.

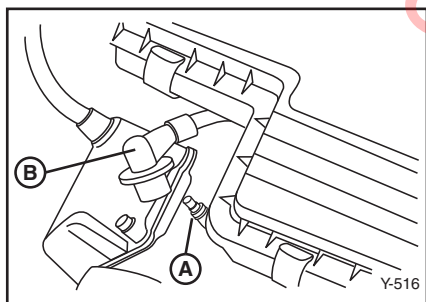


- Ⓐ Spark plug
- Ⓑ Spark plug cap

1. Check for discoloration and remove carbon deposits with a spark plug cleaner or wire brush. The normal electrode color will be tan.
2. Check the spark plug type, and check the spark plug gap with a feeler gauge.

Standard spark plug:
BPR2ES

Spark plug gap:
0.7 ~ 0.8 mm (0.028 ~0.031 in.)

MAINTENANCE

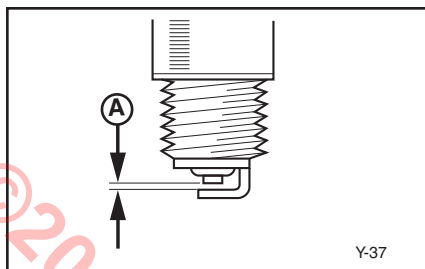

Ⓐ Gap

3. Clean the gasket and plug surfaces and install the spark plug finger-tight before tightening to the following torque:

Spark plug torque:
20 Nm, 2.0 m·kg
(14.5 ft·lb)

Engine Oil Replacement

1. Warm up the engine for several minutes, place the vehicle on a level surface, then stop the engine.

⚠ WARNING


Use caution not to touch hot engine oil or hot engine parts, during the following procedure. Death or serious personal injury can result from failing to comply with the safety instructions in this manual.

NOTICE


To remove the oil from the engine, an oil extraction tool can be used to extract the oil via the dipstick feed hole instead of draining out the drain plug.

2. Block rear tires and lift front end of vehicle. Secure vehicle with car stands.
3. Release two rubber tabs to exhaust duct and four bolts to lower panel.

- Ⓐ Rubber tabs
- Ⓑ Panel bolts

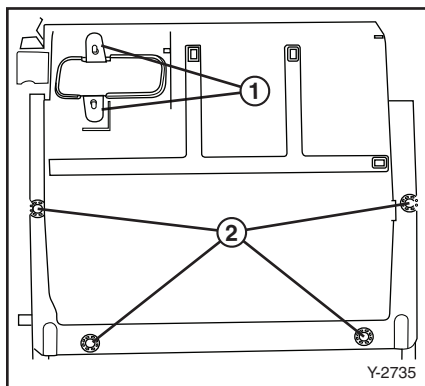

MAINTENANCE

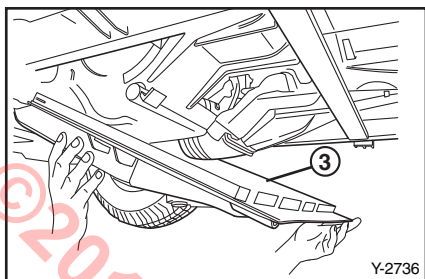


4. Tip the front of the lower panel down and remove the panel.

③ Lower panel

5. Remove tie strap, then remove rubber exhaust duct from plastic duct.

④ Tie strap

⑤ Exhaust duct

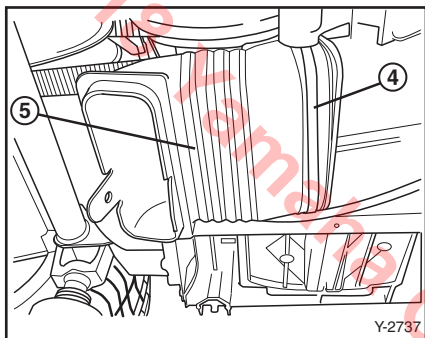

6. Place an oil pan under the engine drain plug.

7. Remove the oil drain plug and let the oil drain completely.


⑥ Drain plug

TIP

Dispose of used oil in an environmentally safe way, such as taking oil to an oil collection station.

8. Install the drain plug, along with a new drain plug gasket, finger-tight before tightening to the following torque:

Drain plug torque:
31 Nm, 3.1 m·kg
(23 ft·lb)

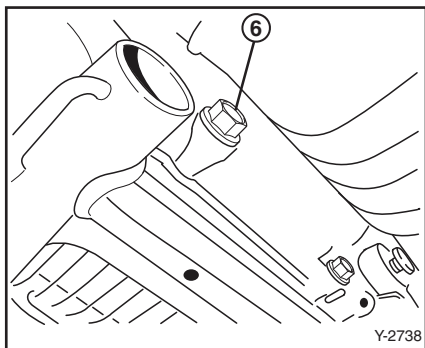


Recommended oil:
YAMALUBE SAE 10W30
4-cycle oil

Engine oil capacity:
1.0 L, 1000 cc (1.0 US qt)

Oil change quantity:
1.0 L, 1000 cc (1.0 US qt)

9. Add the correct quantity of oil through the oil filler hole.

MAINTENANCE

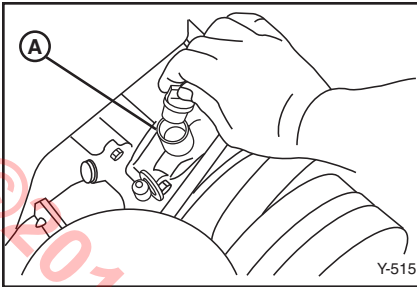

TIP

Recommended engine oil classification: API Service SE, SF, or SG. Engine oils labeled "Energy Conserving II" are recommended.

- (A) Oil filler hole


NOTICE

Use care not to fill past the MAX dipstick mark, and be sure no foreign material enters the crankcase.

After replacing engine oil, check for oil leaks around the drain plug. If oil leaks are found, consult a Yamaha dealer.

10. Reinstall exhaust duct and secure by using a new tie strap.
11. Install panel and mount with four bolts.
12. Secure rubber tabs of exhaust duct to panel.

7

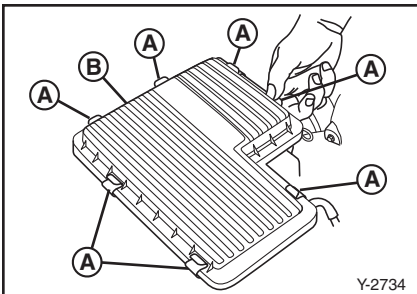


Air Filter

To remove the air filter elements:

1. Unlatch the air filter cover clips and remove cover.
2. Lift the air filter and pre-filter out of the air filter case.

- (A) Air filter cover clips
(B) Air filter cover

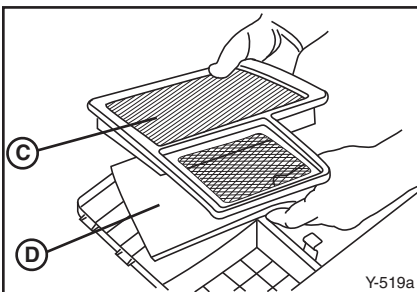

- (C) Air filter
(D) Pre-filter

MAINTENANCE

NOTICE

Be careful not to drop anything into the air inlet. Serious engine damage can result.

Inspection and cleaning:

3. Wash the foam pre-filter in soap and water. Allow it to dry.

Ⓐ Soap and water

Ⓑ Foam element

4. Check the filter element. If damaged or dirty, replace it.

NOTICE

Do not wring out the foam pre-filter, this could cause it to tear.

5. To replace the elements, reverse the above steps.



NOTICE

The pre-filter has a notch on one side. It will only fit in the case one way. Serious engine damage can result from improperly positioned filter.


Drive Belt

To remove the drive belt:

1. Set the drive select lever halfway between forward and reverse.
2. Pull up on the drive belt and push it outward over the edge of the secondary sheave.
3. Turn the secondary sheave clockwise and the drive belt will roll off the sheave.
4. Remove the drive belt from the primary sheave.

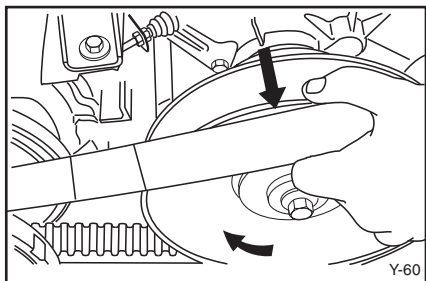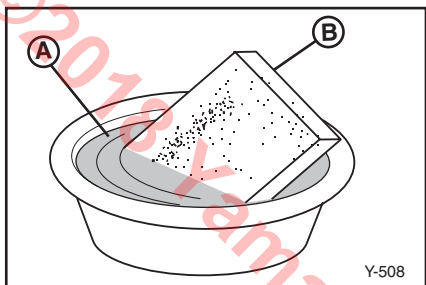

MAINTENANCE

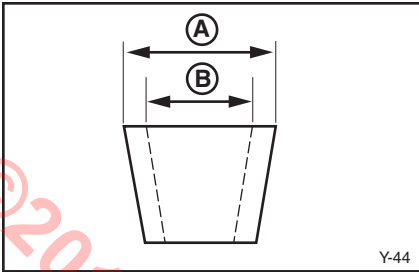


Inspection:

To inspect the drive belt, check for frayed edges or tears, and measure drive belt against the following specification. If the belt shows excessive wear or damage, replace the belt with a new one.

- Ⓐ New: 31.0 mm (1.20 in.)
- Ⓑ Replace when belt reaches: 27.0 mm (1.06 in.)

5. To install the drive belt, reverse the above steps, rolling the belt back over the secondary sheave.

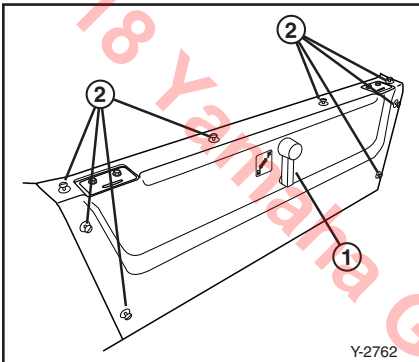


Clutch

Maintenance is required each year for proper drive operation. Refer to the Periodic Maintenance chart in this owner's manual.


Air Duct

Check for debris in intake tube, tubing and connections:


1. Park the vehicle on a flat, level surface and apply the parking brake.
2. Remove the floor mat
3. Remove the seat.
4. Remove the drive select lever.

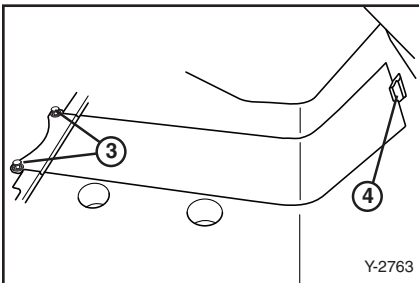

- Ⓐ Drive Select lever
5. Unscrew and remove the 8 retaining pins and remove the front panel.
- Ⓑ Retaining pins
6. Remove the 2 plastic rivets.
- Ⓒ Plastic rivets
- Ⓓ Tab
7. Lift up on the floor panel and slide the panel tab out of the slot. Remove the panel.

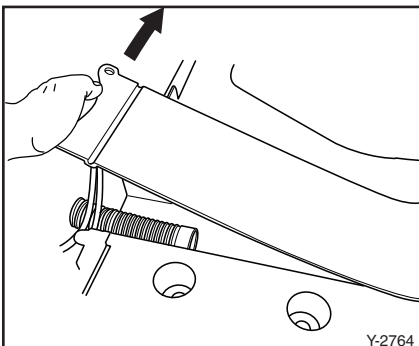


MAINTENANCE

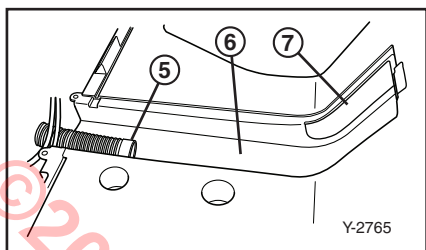

8. Clean out any dirt or debris from the intake tube, the floor trough and the intake air opening.

- ⑤ Intake tube
- ⑥ Floor trough
- ⑦ Intake air opening

9. After removing debris, install the floor panel, front panel, drive select lever, seat and the floor mat.

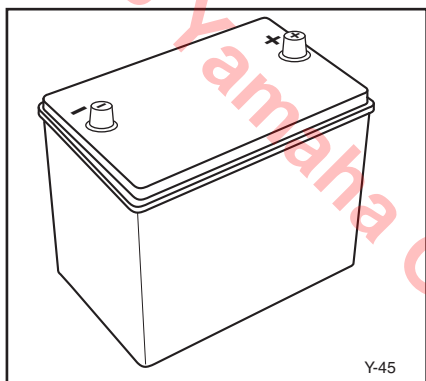

Battery

The 12-volt battery that provides starting power to your gas car normally does not require the addition of water. If the battery loses its charge, have an experienced mechanic charge it.

WARNING

Battery electrolyte is poisonous and dangerous, causing severe burns, etc. It contains sulfuric acid. Avoid contact with skin, eyes, or clothing.

Antidote:

EXTERNAL: Flush with water.

INTERNAL: Drink large quantities of water or milk. Follow with milk of magnesia, beaten egg, or vegetable oil. Call physician immediately.

EYES: Flush with water for 15 minutes and get prompt medical attention.

Batteries produce explosive gases. Keep sparks, flame, cigarettes, etc., away.

Ventilate when charging or using in enclosed space. Always shield eyes when working near batteries.

KEEP OUT OF REACH OF CHILDREN.

MAINTENANCE

Fuse Replacement

⚠ WARNING



Be sure to use the specified fuse. Using a wrong fuse can cause electrical system damage and create a fire hazard. Death or serious personal injury can result from failing to comply with the safety instructions in this manual.

NOTICE

When replacing a fuse, be sure the main switch is turned off to prevent accidental short-circuiting and electrical system damage.

1. Locate the in-line fuse box in the battery compartment.
2. Pull fuse holder cover off.
3. Pull fuse out, inspect and replace if necessary.

Ⓐ Fuse box

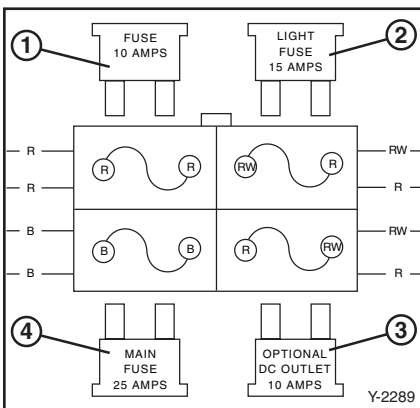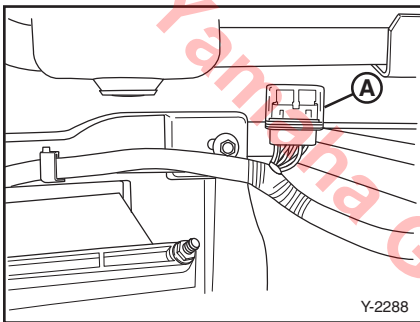

Fuse Type:



- ① DC Outlet Fuse (10A), Blade Style
- ② Light Fuse (15A), Blade Style
- ③ Fuse (10A), Blade Style
- ④ 25 Amp, Blade Style (MAIN)
Fuse location off of negative battery terminal @ 15 cm (6 in.)

MAINTENANCE

Transmission Oil

To replace transmission oil:

1. Place the vehicle on a flat, level surface.
2. Block rear tires and lift front end of vehicle. Secure vehicle with car stands.
3. Remove the two panel retaining bolts for the lower panel.
4. Tip the front of the lower panel down and unhook the front of the panel to remove the panel.
5. Place an oil pan under the transmission.
6. Remove the drain plug from the transmission and allow the oil to drain completely.

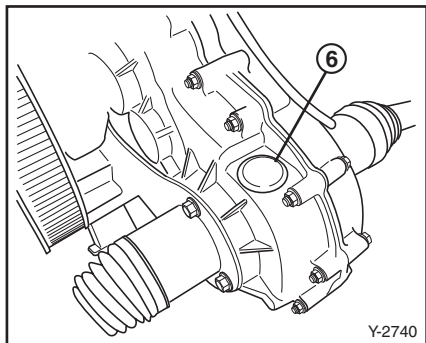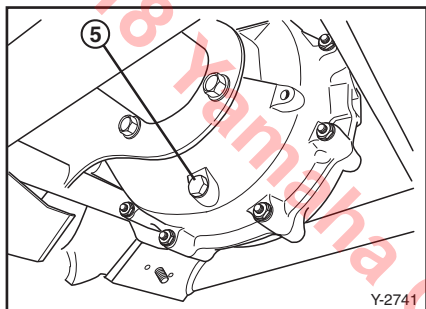

⑤ Oil drain plug

TIP

Dispose of the oil in an environmentally safe way, such as taking oil to an oil collection station.

7. Install the drain plug.
8. Remove the oil fill plug on top of the transmission.

⑥ Oil fill plug

9. Fill the transmission with 16.06 oz (475 cc) and replace the oil fill plug.
10. Install the lower panel and exhaust duct tabs.

Recommended oil:
YAMALUBE SAE 80W-90 Gear Oil


Transmission oil capacity:
475 cc (16.06 oz)

Transmission oil change quantity:
475 cc (16.06 oz)

MAINTENANCE

⚠ WARNING

Before performing wheel or brake maintenance, verify that the main switch is in the “OFF” position. Accidental starting of the vehicle could cause the vehicle to move, causing death or serious personal injury.

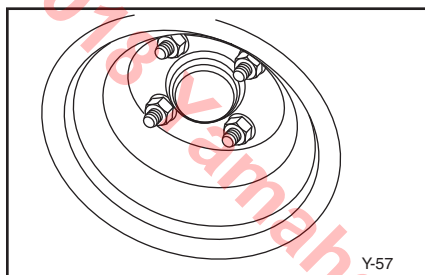

Wheel Replacement

To remove and install a wheel on your sport vehicle:

1. With the wheels blocked to prevent the sport vehicle from moving, loosen the wheel nuts.
2. Elevate the sport vehicle with a jack and remove the wheel nuts and the wheel.
3. Reverse the removal steps when installing the wheel.

Wheel nut tightening torque:
88 Nm, 8.8 m·kg (65 ft·lb)

Brake Adjustment


The brakes on your sport vehicle are self-adjusting.

Before you operate the sport vehicle, press down on the brake pedal several times to make sure the brakes are functioning properly.

⚠ WARNING

Consult your Yamaha dealer before using your sport vehicle if you suspect brake problems. Brake failure could result in a serious accident. Death or serious personal injury can result from failing to comply with the safety instructions in this manual.

MAINTENANCE

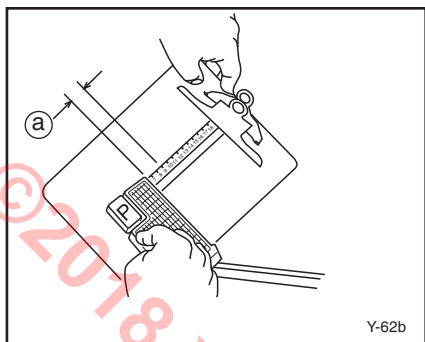


Brake Pedal Free Play Adjustment

Check the brake pedal free play by pressing against the pedal with two fingers (using light force) and measuring the distance the pedal travels before resistance is felt.

Brake pedal free play (a):
50-55 mm (1.97-2.17 in.)


To adjust the brake pedal free play:


1. Remove the floor mat and service lid from the floor of the sport vehicle.
2. If the free play distance needs adjusting, loosen the lock nut (A) and turn the adjusting nut (B) in or out until the free play specification is met. Then tighten the lock nut in place.

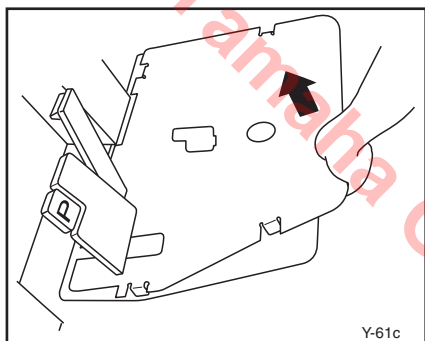

WARNING

Do not over-tighten the brake cables. Over-tightening will increase brake wear and affect overall performance of sport vehicle. Premature brake wear can result. Death or serious personal injury can result from failing to comply with the warning labels in this manual.

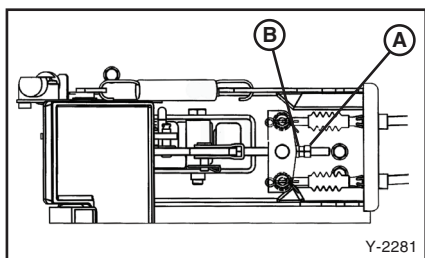

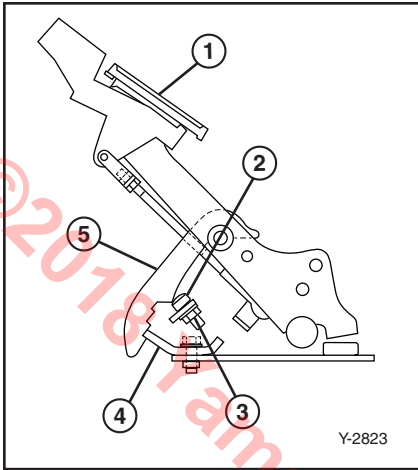

Parking Brake Release Adjustment


NOTICE

Before performing parking brake release adjustment, adjust brake pedal free play.

1. Apply pressure to the parking brake pedal until the brake nail catches the first latch position on the sector.
2. Loosen the locknut and turn the bolt counterclockwise until it contacts the sector.
3. Turn the bolt clockwise 3/8 (120 degrees), then tighten locknut.

- ① Parking brake pedal
- ② Bolt
- ③ Locknut
- ④ Brake nail
- ⑤ Sector



MAINTENANCE

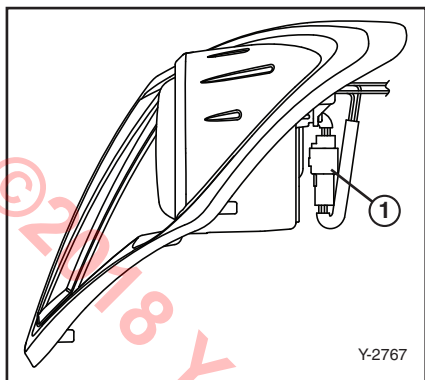

Replacing a Headlight Bulb

If the headlight burns out, replace it as follows:

1. Disconnect the wire connector (1) from the headlight assembly.
2. Remove the three screws (2) and remove the light control unit.
3. Remove the four screws (3) to remove the headlight assembly from the holder.
4. Remove the headlight assembly from the holder.
5. Install new headlight assembly into holder and secure with the four screws.
6. Install the light control unit and fasten with three screws.
7. Connect the wire connector to the headlight assembly.

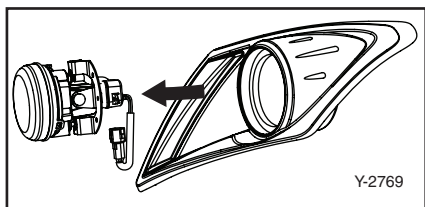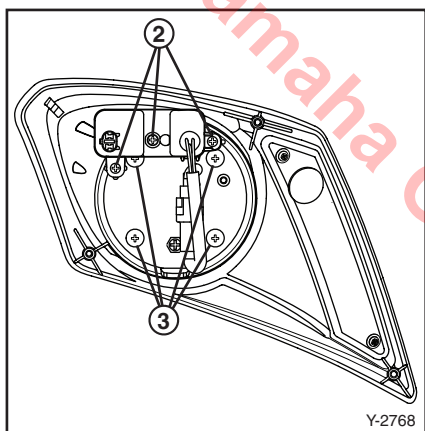

Adjusting a Headlight



NOTICE

It is recommended to have the headlight adjustment performed by a Yamaha dealer.

TIP

The screw can be accessed from under the fender.

1. Using a Phillips head screwdriver, turn the adjusting screw ①.
2. Turning the screw clockwise will lower the beam and turning the screw counter-clockwise will raise the beam.

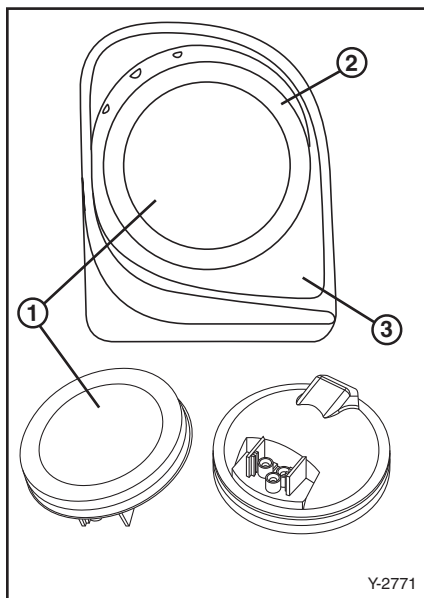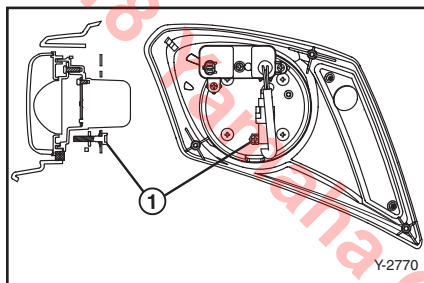

Replacing a Taillight Bulb

1. If a taillight bulb burns out, replace the bulb assembly ① by removing the rubber grommet ② from the bezel assembly ③.
2. Remove the wire connector, replace the bulb, and reinstall by fitting the rubber grommet ② over the bulb assembly ① and bezel ③.

STORAGE

Fill the fuel tank with fresh fuel and add the specified amount of Yamaha Fuel Stabilizer and Conditioner or equivalent product. Operate the vehicle for at least five minutes to distribute treated fuel through the fuel system.

Specified amount:

7.5 cc of stabilizer for each liter of fuel (1 oz. of stabilizer for each gallon of fuel)

TIP

Use of fuel stabilizer and conditioner eliminates the need to drain the fuel system. Consult a Yamaha dealer if the fuel system needs to be drained instead.

Perform the following preparations when storing your sport vehicle for extended periods of time.

NOTICE

8

Yamaha Golf-Car Company does not approve the use of high-pressure washers to clean the products they manufacture. Doing so may damage the finish on the body or result in doing other damage not covered by warranty.

TIP

Turn main switch key to "OFF" position, remove key and store key in a safe place.

DRAINING FUEL

⚠ WARNING

Gasoline and its vapors are highly flammable and explosive. Death or serious personal injury can result from failing to comply with the safety instructions in this manual.

- Do not smoke when draining fuel and keep away from sparks, flames, or other sources of ignition.
- Stop engine and allow it to cool for several minutes before draining fuel.
- Drain fuel in a well-ventilated area.
- Take care not to spill gasoline. If gasoline spills, wipe it up immediately with dry rags. Always dispose of gasoline-soaked rags properly.
- Tighten the filler cap securely after checking fuel level to avoid leaking.
- If you inhale a lot of gasoline vapor, or get gasoline in your eyes, get immediate medical attention.
- If any gasoline gets on your skin, immediately wash with soap and water. Change clothing if gasoline spills on it to avoid potential fire hazard.

ENGINE PREPARATION

With the key removed and the spark plug lead disconnected, turn the clutch by hand until compression is felt. This puts the valves in the closed position.

CHASSIS PREPARATION

1. Verify the tire pressure is set to
Front: 152 kPa (22 psi)
Rear: 152 kPa (22 psi)
2. Clean exterior of the sport vehicle and apply a rust inhibitor.
3. Cover the sport vehicle with a breathable cover and store it in a dry, well-ventilated area.
2. Have the battery recharged every 60-90 days to keep it fully charged. The battery must be kept fully charged to avoid damage.
3. Batteries like the one supplied with your car normally do not require you to check the water level inside the battery for the one-year warranty period provided by the manufacturer.

NOTICE

Do not allow cleaning solution to enter battery cells. Serious battery damage can result.

BATTERY PREPARATION

1. Remove the battery from your sport vehicle and store it in a cool, dry place that stays between 0°C (32°F) and 30°C (90°F).
4. Clean the top of the battery with a solution of baking soda and water, as necessary, to remove corrosion.

SPECIFICATIONS

GENERAL SPECIFICATIONS

Items	SPORT VEHICLE
Dimensions:	
Overall length	2750 mm (108.3 in.)
Overall width	1291 mm (50.8 in.)
Overall height (steering height)	1277 mm (50.3 in.)
Floor board height	375 mm (14.8 in.)
Wheelbase	1646 mm (64.8 in.)
Tread:	
Front	963 mm (37.9 in.)
Rear	1014 mm (39.9 in.)
Minimum ground clearance	158 mm (6.2 in.)
Weight:	
Dry weight	424.5 kg (935.9 lb)
Performance:	
Factory and maximum speed setting	24 km/h (15 mph)
Minimum turning radius	3.0 m (9.8 ft)
Seating capacity	Two occupants per seat, four occupants maximum
Vehicle rated capacity (passengers, cargo, trailer, access)	340 kg (749.6 lb)
Gross vehicle weight (curb & vehicle rate capacity)	802.5 kg (1769.2 lb)
Fuel tank capacity	22.0 L (5.8 U.S. gallons)

SPECIFICATIONS

ENGINE

Items	SPORT VEHICLE
Description:	
Engine type	4-stroke, Gasoline, OHV
Number of cylinders	Single
Displacement	357 cm ³
Bore x stroke	85 x 63 mm (3.30 x 2.48 in.)
Compression ratio	8.1:1
Rated output	8.5 kw (11.4 hp)/3500 rpm
Cooling system	Forced air-cooled
Starting system	Starter
Ignition system	TCI Magneto
Spark plug type	BPR2ES
Spark plug gap	0.7-0.8 mm (0.028-0.031 in.)
Lubrication system	Splash
Engine oil type	YAMALUBE SAE 10W30 4-cycle oil
Engine oil capacity	1.0 L, 1000 cc (1.0 US qt)
Oil change quantity	1.0 L, 1000 cc (1.0 US qt)

TRANSMISSION

Items	SPORT VEHICLE
Transmission:	
Type	V-belt automatic centrifugal engagement
V-belt width and outer line length	31.0 x 1010 mm (1.20 x 39.76 in.)
V-belt wear limit	27.0 mm (1.06 in.)
Governor:	
Type	Oil bath flyweight
Factory speed setting	24 km/h (15 mph)
Differential/reduction gear:	Secondary reduction system helical gear Secondary reduction ratio: Forward 9.789:1; Reverse 14.358:1 Differential type bevel gear Lubricant/capacity SAE 90 gear oil/ 475 cc (475 mL, 0.50 US qt)

SPECIFICATIONS


BATTERIES


Items	SPORT VEHICLE
Battery:	BCI group 24, RC: minimum 75 min CCA: minimum 400A

CHASSIS

Items	SPORT VEHICLE
Steering system: Type Steering angle (L.H.) Steering angle (R.H.)	Rack and Pinion 1.85 turn 1.85 turn
Brakes: Brake system Type of brake Brake pedal freeplay linkage adjustment (Brake cable end play)	Mechanical drum brake on each rear wheel with self-adjusters Dual internal expanding shoe Leading/trailing shoes (self-adjusting) 50-55 mm (1.97-2.17 in.) 0.004-0.02 in. (0.1-0.5 mm)
Parking brake: Type	Foot type; parking brake with automatic release
Wheel: Tire size: Front Rear Rim size: Tire pressure:	20 x 10-8.00/PR 20 x 10-8.00/PR 8 x 7 Front: 152 kPa (22 psi) Rear: 152 kPa (22 psi)
Lights: Bulb voltage, wattage x quantity: Headlight Taillight	LED 13.5 V / 14.5 W x 2 12 V / 2.1 amp and .48 amp x 2

JDD SCHEMATIC

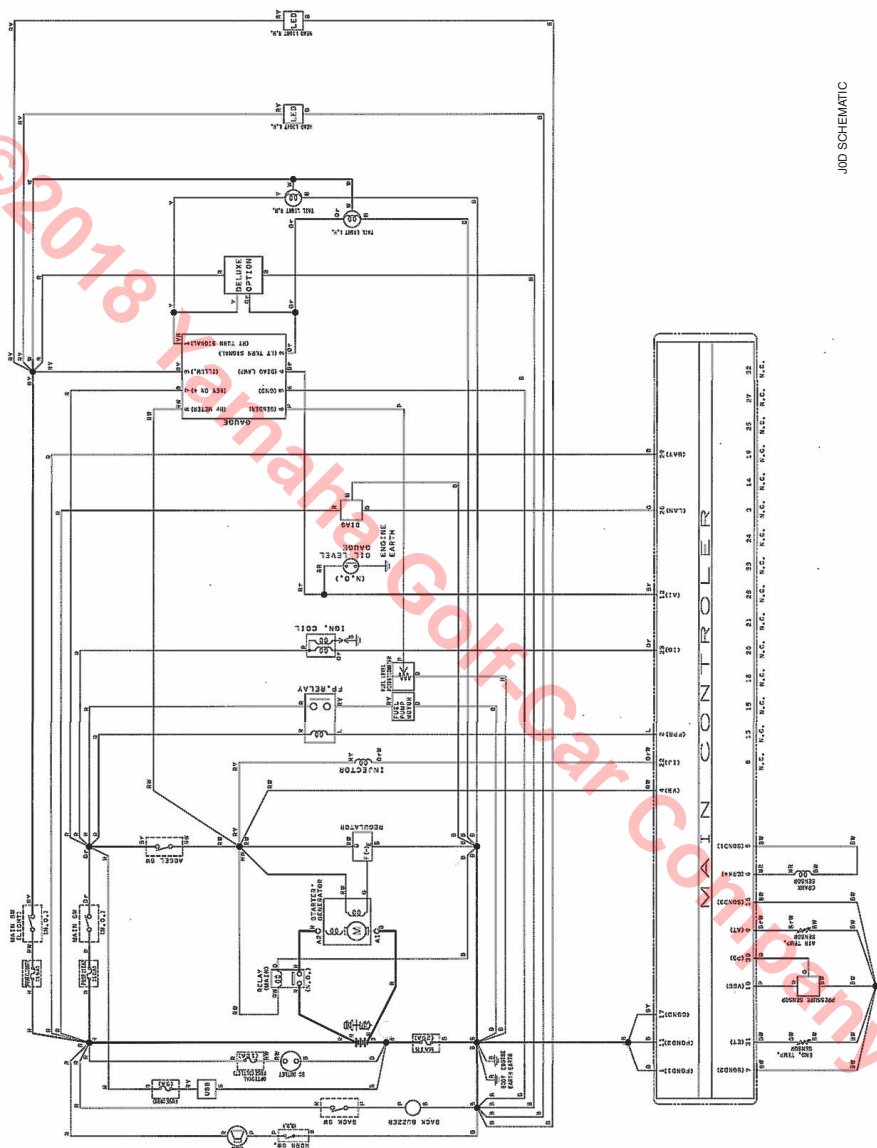

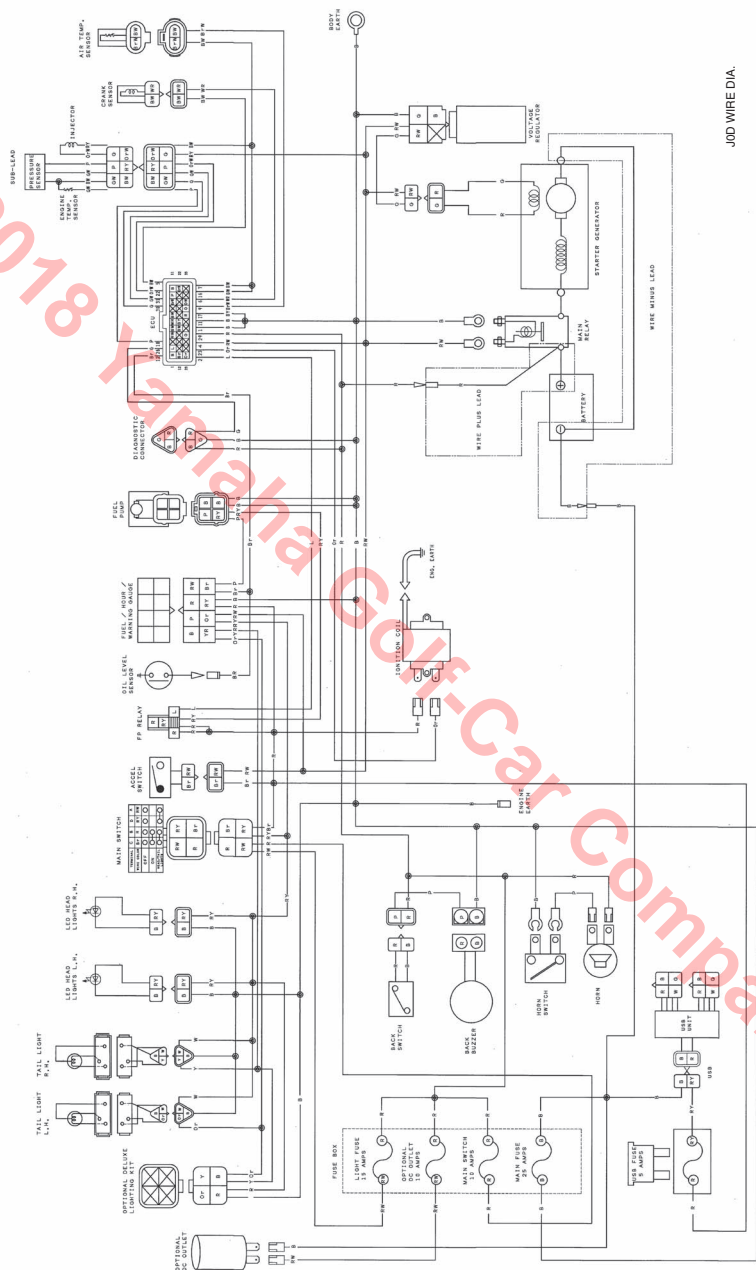

©2018 Yamaha Golf-Car Company



Printed in U.S.A.
2018-KCC



Yamaha Motor Corporation USA
800-879-0078